


ベアリング用スペーサ

—内輪用・外輪用—



CADデータフォルダ名: 14_Bearings_with_Holder

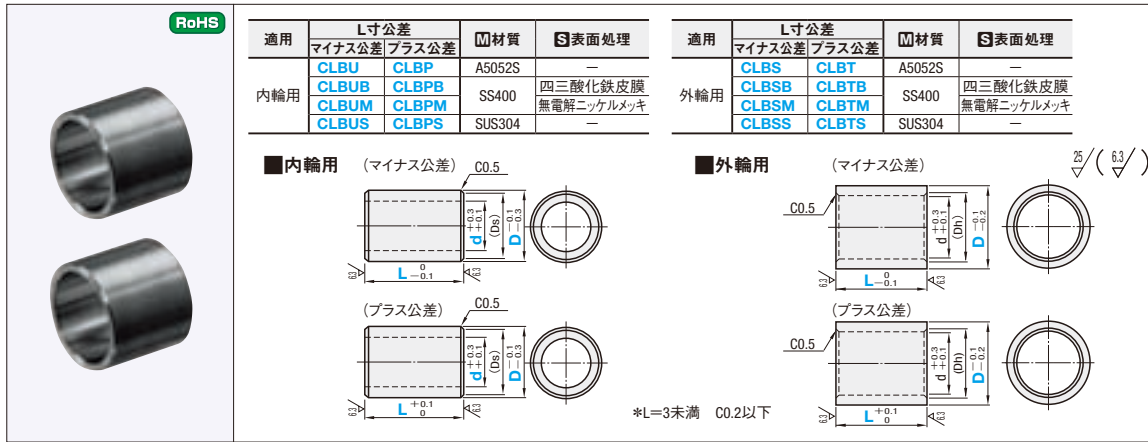

型式 Type	d	D	L 指定0.1mm単位	Ds	適用ベアリング	¥基準単価											
						CLBU・CLBP	CLBUB・CLBPB	CLBUM・CLBPM	CLBUS・CLBPS								
内輪用 (マイナス公差)	3	5	1.0~50.0	4	673ZZ・683ZZ・623ZZ	310	370	—	370	420	—	390	450	—	390	510	—
	4	7		6	674ZZ・684ZZ・624ZZ	370	410	—	420	460	—	450	500	—	460	550	—
	5	8		7	675ZZ・685ZZ・625ZZ	410	450	—	460	500	—	460	500	—	500	600	—
	6	9		8	676ZZ・686ZZ・626ZZ	450	480	—	500	540	—	500	530	—	540	650	—
	8	10		9	678ZZ	—	—	—	550	590	—	500	550	—	—	—	—
	8	11		10	678ZZ・688ZZ・628ZZ	480	520	—	490	520	—	530	580	—	580	680	—
	10	12		11	670ZZ	—	—	—	550	590	—	500	550	—	—	—	—
	10	13		12	680ZZ	520	550	720	510	550	690	550	600	780	630	750	980
	10	14		13	690ZZ・600ZZ	530	590	760	550	590	770	500	550	720	570	690	900
	10	15		14	620ZZ・630ZZ	570	630	820	580	630	830	530	580	770	610	730	960
内輪用 (プラス公差)	12	16	1.0~100.0	14	6701ZZ・6801ZZ	570	630	820	580	630	830	520	560	760	610	730	960
	12	17		15	6901ZZ・6001ZZ	570	630	820	580	630	830	530	580	770	610	730	960
	15	18		16	6801ZZ・6001ZZ	570	630	820	580	630	830	530	580	770	610	730	960
	15	18		17	6201ZZ・6301ZZ	590	660	850	590	650	840	550	600	780	630	750	980
	15	19		17	6702ZZ・6802ZZ	590	660	850	590	650	840	550	600	780	630	750	980
	15	21		18	6902ZZ・6002ZZ	590	660	850	590	650	840	550	600	780	630	750	980
	15	21		20	6202ZZ	600	670	900	590	670	890	570	630	850	650	820	1,080
	15	23		22	6302ZZ	—	—	—	670	740	980	650	720	950	—	—	—
	15	23		19	6803ZZ	610	700	940	590	670	890	570	630	850	650	820	1,080
	15	24		21	6903ZZ・6003ZZ	610	700	940	590	670	890	570	640	860	650	820	1,080
外輪用 (マイナス公差)	20	25	2.0~100.0	23	6203ZZ	660	730	990	610	720	920	580	660	870	700	860	1,140
	20	27		25	6303ZZ	—	—	—	670	740	980	650	720	950	—	—	—
	20	27		26	6804ZZ・6904ZZ	610	730	960	590	670	890	580	670	870	660	860	1,100
	20	27		24	6904ZZ	630	730	950	600	710	910	580	680	880	660	860	1,100
	20	29		26	6004ZZ・6204ZZ	650	730	960	670	740	980	650	720	950	740	900	1,180
	20	29		28	6304ZZ	—	—	—	700	780	1,040	670	750	1,000	—	—	—
	20	29		27	6805ZZ	650	730	960	680	750	1,000	660	730	970	760	940	1,240
	20	29		28	6905ZZ	670	760	1,000	700	780	1,040	670	750	1,000	760	940	1,240
	20	31		30	6005ZZ	700	780	1,040	730	810	1,070	700	780	1,030	790	980	1,280
	20	33		32	6205ZZ	700	780	1,040	730	810	1,070	700	780	1,030	790	980	1,280
外輪用 (プラス公差)	25	31	3.0~100.0	35	6305ZZ	—	—	—	790	890	1,120	760	990	1,230	—	—	—
	25	33		35	6806ZZ	720	830	1,080	730	840	1,090	710	790	1,050	810	1,040	1,360
	25	36		34	6906ZZ	720	830	1,080	740	870	1,140	720	830	1,100	810	1,040	1,360
	25	36		37	6006ZZ	730	870	1,110	760	900	1,150	730	860	1,110	830	1,080	1,380
	25	38		39	6206ZZ	750	880	1,150	780	970	1,280	750	910	1,190	850	1,100	1,420
	25	40		42	6306ZZ	—	—	—	850	1,020	1,230	940	1,120	1,350	—	—	—
	25	42		37	6807ZZ	820	960	1,200	790	890	1,120	760	990	1,230	970	1,230	1,500
	25	42		41	6907ZZ	870	1,050	1,250	790	950	1,130	870	1,050	1,250	1,030	1,300	1,550
	25	44		43	6007ZZ・6207ZZ	920	1,100	1,320	830	980	1,190	910	1,080	1,310	1,090	1,360	1,630
	25	46		45	6207ZZ	—	—	—	850	1,020	1,230	940	1,120	1,350	—	—	—
外輪用 (プラス公差)	30	38	3.0~100.0	47	6307ZZ	—	—	—	890	1,060	1,280	980	1,160	1,400	—	—	—
	30	40		42	6808ZZ	930	1,110	1,340	840	990	1,210	930	1,090	1,330	1,120	1,400	1,710
	30	43		45	6908ZZ	950	1,120	1,380	850	1,020	1,230	940	1,120	1,350	1,120	1,400	1,710
	30	44		48	6008ZZ・6208ZZ	1,010	1,200	1,460	890	1,060	1,280	980	1,160	1,400	1,200	1,480	1,810
	30	46		51	6208ZZ	—	—	—	940	1,190	1,510	1,020	1,300	1,640	—	—	—
	30	48		53	6308ZZ	—	—	—	1,070	1,380	1,730	1,180	1,520	1,880	—	—	—
	30	48		52	6809ZZ	—	—	—	990	1,280	1,600	1,090	1,410	1,740	—	—	—
	30	50		54	6909ZZ	—	—	—	1,100	1,420	1,780	1,210	1,570	1,930	—	—	—
	30	53		55	6009ZZ	—	—	—	1,120	1,440	1,810	1,230	1,600	1,960	—	—	—
	30	56		59	6209ZZ	—	—	—	1,210	1,560	1,950	1,330	1,730	2,120	—	—	—

① L=3未満のとき、*部ベアリングは使用できません。

型式 Type	D	L 指定0.1mm単位	d	Dh	適用ベアリング	¥基準単価													
						CLBS・CLBT	CLBSB・CLBTB	CLBSM・CLBTM	CLBS・CLBT										
外輪用 (マイナス公差)	6	1.0~50.0	4	5	673ZZ	360	420	—	410	490	—	440	510	—	440	580	—		
	7		5	6	674ZZ	370	470	—	420	530	—	450	570	—	460	630	—		
	8		5	6	693ZZ	400	480	—	450	540	—	480	580	—	470	650	—		
	10		7	8	623ZZ	410	490	—	460	570	—	460	550	—	500	660	—		
	11		7	8	694ZZ	420	520	—	490	580	—	470	580	—	520	680	—		
	13		9	10	624ZZ・695ZZ	470	550	—	470	560	—	520	610	—	520	680	—		
	14		10	11	605ZZ	480	590	—	490	590	—	530	650	—	520	690	—		
	15		10	11	696ZZ	520	630	—	520	630	—	530	650	—	560	730	—		
	16		11	12	625ZZ	530	640	—	550	650	—	530	650	—	570	750	—		
	17		12	13	606ZZ	580	670	—	560	660	—	530	650	—	610	790	—		
	19		14	15	626ZZ・698ZZ	590	710	—	570	700	—	550	670	—	630	840	—		
	外輪用 (プラス公差)		19A	3.0~50.0	16	17	6800ZZ	590	710	840	580	710	830	560	680	760	630	840	1,000
			21		18	19	6801ZZ	600	730	880	590	720	860	570	690	800	660	880	1,040
			22		17	18	608ZZ・690ZZ	630	750	890	600	730	870	580	700	830	660	880	1,040
			24		19	20	628ZZ・6901ZZ	660	780	950	640	760	910	620	730	880	700	920	1,100
			26		21	22	6802ZZ	670	820	990	650	790	930	640	760	900	740	980	1,160
			26A		20	21	6000ZZ	700	840	1,000	670	810	970	650	780	930	740	980	1,160
			28		23	24	6803ZZ	670	820	990	700	830	990	670	800	960	740	980	1,160
			30		22	23	6001ZZ・6902ZZ	680	840	1,020	710	840	1,010	680	820	980	780	1,020	1,220
32		24	25		6200ZZ	720	840	1,040	740	880	1,070	720	850	1,030	810	1,060	1,280		
32A		25	26		6201ZZ・6002ZZ	760	900	1,090	780	930	1,120	750	900	1,080	850	1,120	1,340		
35		29	30		6804ZZ	770	930	1,110	780	930	1,120	760	930	1,100	870	1,150	1,370		
37		29	30		6202ZZ	780	950	1,130	780	930	1,120	780	950	1,130	890	1,180	1,400		
37A		31	32		6904ZZ	830	1,000	1,200	780	930	1,120	830	1,000	1,190	940	1,240	1,660		
42		34	35		6805ZZ	840	1,040	1,230											