


位置決め付ロッキングブロック

ー角度(G)指定タイプ(インロー部4mm/8・10mm)ー

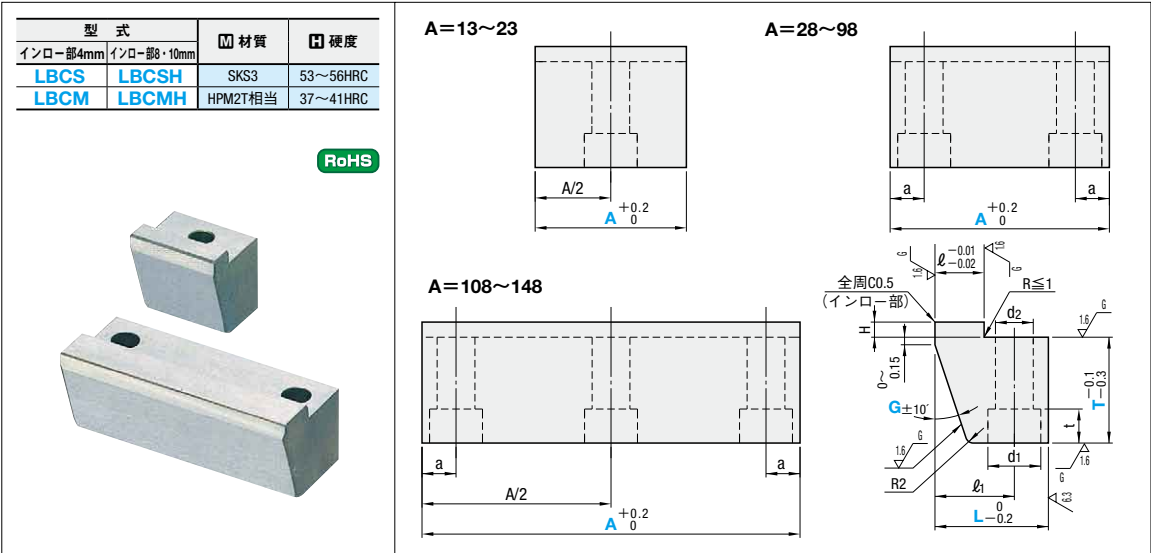

■インロー部 H=4mm

H	a	ℓ	ℓ ₁	d ₁	d ₂	t	型 式		T	A	*2G°						
							Type	L			指定1°単位						
4	6	6	13	9.5	5.5	6	LBGS (SKS3)	20	10	13 15 18 23 28 33 38 48	5~33						
									15		5~24						
									20	13 15 18 23 28 33 38 48 *158	5~18						
								7	10	17	11	6.5	7	25	10	*118 *123 28 33 38 48 58 68 78 88 98	5~33
															15	*118 *123 28 33 38 48 58 68 78 88 98 *1108	5~33
															20		5~26
	30	25	*123 28 33 38 48 58 68 78 88 98 *1108	5~21													
		15		5~33													
		20		5~31													
	8	13	21	14	9	9		35	25	33 38 48 58 68 78 88 98 108 118 128	5~26						
									30		5~22						
									40		5~18						
								10	15	24	17	11	11	40	25	38 48 58 68 78 88 98 108 118 128	5~28
															30		5~24
															35	48 58 68 78 88 98 108 118 128	5~21
	13	17	27	19	14	13								*340	40	58 68 78 88 98 108 118 128 138	5~26
															35		5~24
															40	68 78 88 98 108 118 128 138	5~21
							16	23	33	25	18	17	*350	45		5~19	
														30		5~28	
														35	78 88 98 108 118 128 138 148	5~24	
	40		5~21														
	45		5~19														

☞ *1. A18・A23・A58・A108はLBCS,LBCMのみの規格となります。 ☞ *2. G15,17,20,22については、廉価・短納期の定尺タイプLBCSK・LBCM(P.727)でも選び頂けます。ご確認の上ご利用ください。 ☞ *3. L40・L50はLBCSのみの規格となります。 インロー部の強度計算 P.1508

■インロー部 H=8・10mm

H	a	ℓ	ℓ1	d1	d2	t	型 式	T	A	G°
Type	L									指定1°単位
8	7	12	18	9.5	5.5	6	25	25	23 28 33 38 48 58 68 78 88 98	5~21
								30	38 48 58 68 78 88 98 108 118 128	5~24
								40	48 58 68 78 88 98 108 118 128	5~18
								50		5~26
	10	17	25	11	6.5	7	35	30	48 58 68 78 88 98 108 118 128 138	5~24
								40		5~21
								45		5~19
								50	58 68 78 88 98 108 118 128 138 148	5~21
	13	19	28	14	9	9	40	35		5~24
								45		5~19
								50		5~21
								55		5~19

☞ インロー高さHを長くすると大きい曲げモーメントが働き、インロー部に大きい力が作用しますので、ご注意ください。 ☞ インロー部の強度計算 P.1508 ☞ インロー部H=4mmの位置決め付ロッキングブロックとは取付ボルト径、ボルト位置ℓ、インロー部幅ℓが異なっていますのでご注意ください。

Order 注文例: LBCS30 - 25 - A58 - G18, LBCM30 - 25 - A58 - G15. Delivery 出荷日: 5 日目出荷. Price 価格: 数量スライド価格 (☞1円未満切り捨て) P.47. 数量区分: 1~9, 10~19, 20~29, 30~. 値引率: 基準単価, 5%, 10%, お見積り. 表示数量超えはWOSIにてご確認ください.

型 式	T	¥基準単価 1~9本	A13~18	A23	A28	A33	A38	A48	A58	A68	A78	A88	A98	A108	A118	A128	A138	A148
LBCS (SKS3)	20	10・15・20	3,480	3,480	3,940	4,190	4,140	4,470	4,790	—	—	—	—	—	—	—	—	—
	25	10・15	3,530	3,530	4,090	4,090	4,090	4,090	5,600	6,030	6,280	6,450	6,790	7,240	—	—	—	—
	30	20・25	—	3,890	4,190	4,190	4,190	4,190	5,770	6,200	6,450	6,620	6,960	7,420	—	—	—	—
	35	15・20	—	—	—	4,590	4,590	4,590	4,590	4,590	4,590	4,740	7,730	8,240	8,490	8,750	—	—
	40	25・30	—	—	—	4,690	4,690	4,690	4,690	4,690	4,690	4,740	7,730	8,240	8,490	8,750	—	—
	50	25・30	—	—	—	4,790	4,790	4,790	4,790	4,790	4,790	4,810	8,750	9,170	9,430	9,770	—	—
	55	30・35	—	—	—	—	—	5,290	5,290	5,290	5,290	9,600	9,850	10,360	10,870	11,130	—	—
	60	30・35	—	—	—	—	—	6,290	6,290	6,290	6,290	10,110	10,700	11,210	11,470	11,810	—	—
	65	40・45	—	—	—	—	—	—	7,190	7,190	7,190	11,640	12,320	12,740	13,170	13,590	—	—
	70	30・35	—	—	—	—	—	—	8,770	8,770	8,770	13,760	14,360	14,780	15,210	15,290	—	—
	75	40・45	—	—	—	—	—	—	8,990	8,990	8,990	13,930	14,530	14,950	15,460	15,460	—	—
LBCM (HPM2T相当)	20	10・15・20	3,320	3,320	3,710	3,960	4,040	4,280	4,600	—	—	—	—	—	—	—	—	—
	25	10・15	3,420	3,420	3,800	3,800	3,800	3,800	5,170	5,580	5,740	5,980	6,220	6,570	—	—	—	—
	30	20・25	—	3,510	3,990	3,990	3,990	3,990	5,250	5,740	5,900	6,140	6,380	6,740	—	—	—	—
	35	15・20	—	—	—	4,180	4,180	4,180	4,180	4,180	4,180	6,870	7,110	7,510	7,750	8,080	—	—
	40	25・30	—	—	—	4,280	4,280	4,280	4,280	4,280	4,280	6,870	7,110	7,510	7,750	8,080	—	—
	50	25・30	—	—	—	—	4,370	4,370	4,370	4,370	4,370	7,680	8,000	8,400	8,650	8,970	—	—

■インロー部 H=8・10mm

型 式	T	¥基準単価 1~9本	A23	A28	A33	A38	A48	A58	A68	A78	A88	A98	A108	A118	A128	A138	A148
LBCSH (SKS3)	25	25	5,610	6,040	6,040	6,040	6,040	6,920	7,290	8,060	8,990	9,460	—	—	—	—	—
	35	30	—	—	—	6,900	6,900	8,200	8,680	9,870	11,500	11,970	12,780	12,780	12,780	—	—
	40	40	—	—	—	7,620	8,870	9,700	11,190	12,640	13,760	14,430	14,430	14,430	—	—	—
	45	30・35	—	—	—	—	9,060	10,860	10,860	11,640	12,950	14,400	15,340	15,340	15,340	17,020	—
	50	45	—	—	—	—	10,360	11,010	12,020	12,020	13,830	15,580	16,420	16,420	16,420	19,010	—
	55	35	—	—	—	—	12,640	12,640	12,640	14,740	16,840	19,540	19,540	19,540	19,540	19,640	19,640
LBCM (HPM2T相当)	25	25	5,070	5,750	5,750	5,750	5,750	6,520	7,280	7,280	8,060	8,580	—	—	—	—	—
	35	30	—	—	—	6,300	6,300	7,490	8,200	8,200	10,380	10,720	11,540	11,540	11,540	—	—
	40	40	—	—	—	—	6,720	8,210	8,870	8,870	11,330	12,410	13,100	13,100	13,100	—	—
	45	30・35	—	—	—	—	8,360	9,060	9,060	9,060	11,760	12,800	13,790	13,790	13,790	15,470	—
	50	45	—	—	—	—	10,000	10,360	10,360	10,360	12,980	13,890	15,520	15,520	15,520	17,130	—
	55	35	—	—	—	—	12,050	12,050	12,050	13,490	14,930	17,450	17,450	17,450	17,450	17,610	17,610