


小径玉軸受

—開放形—

CADデータフォルダ名: 14_Bearings_with_Holder

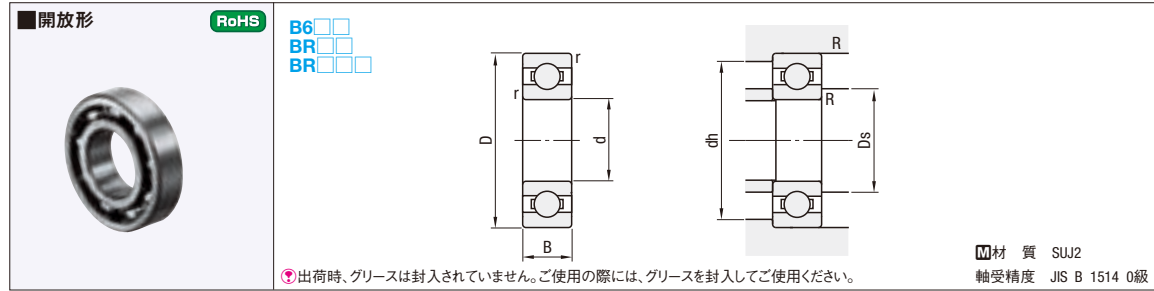

型式	d	D	B	r (min)	基本定格荷重		許容回転数 rpm (参考)	取付関係寸法			質量 (g) (参考)	¥基準単価
					Cr (動) N	Co (静) N		Ds (min)	dh (max)	R (max)		
B683	3	7	2	0.1	311	112	63000	3.85	6.35	0.1	0.32	250
B603		9	3	0.15	571	189	56000	4.35	7.9	0.15	0.84	180
B623		10	4		631	219	50000	4.35	7.98		1.45	
B634	4	16	5	0.3	1340	523	36000	6.7	13	0.3	5.24	140
B605	5	14		0.2	1329	507	40000	6.9	12.2	0.2	3.46	100
B625		16		0.3	1729	675	36000	7.5	13.8	4.95		
B606	6	17	6	0.3	2263	846	38000	8.2	14.8	0.3	5.94	
B626		19			2336	896	32000	8.5	16.5		8.12	
B608	8	22			7	3293	1379	34000	10.5		19.03	11.8
B628		24	8	3333	1423	28000	11.9	19.9	17.1	120		

型式	d	D	B	r (min)	基本定格荷重		許容回転数 rpm (参考)	取付関係寸法			質量 (g) (参考)	¥基準単価
					Cr (動) N	Co (静) N		Ds (min)	dh (max)	R (max)		
BR63	3	6	2	0.1	209	74	71000	3.7	4.9	0.1	0.2	280
BR74	4	7			311	115	60000	4.75	6.25		0.23	290
BR84		8		0.15	395	141	56000	5	6.8	0.39		
BR104	5	10	3	0.2	711	272	48000	6.15	8.35	0.15	0.96	280
BR85		8	2	0.1	308	120	53000	5.75	7.25	0.1	0.25	300
BR95			9	2.5	431	169	50000	6	7.8	0.15	0.54	
BR105	10	3	0.15	431	169	0.78			0.91		280	
BR106		6	2.5	496	218	45000	7.04	8.9	0.1	0.55	260	
BR126			12	3	0.2	714	295	43000	7.73	10.19		0.15
BR128	8	12	2.5	0.15	543	274	40000	9.05	10.9	0.1		0.7
BR148		14	3.5	0.2	817	386	38000	9.86	12.19	0.15	1.9	280

Order 注文例: 型式 B605 BR126

Delivery 出荷日: 在庫品 翌日出荷 P89

Price 価格: 数量スライド価格 (1円未満切り捨て) P89

数量	1~14	15~29	30~100
値引率	標準単価	5%	10%

kgf=N×0.101972

玉軸受の構造と特長


形式	開放形	両シールド形	非接触ゴムシール形	接触ゴムシール形
摩擦トルク	小	小	小	大 シールが内輪に接触しているため
高速性	○	○	○	△
防塵性	×	△	○	◎
防水性	×	×	×	○ 飛沫がかかる条件利用可
使用温度	-10 ~ +100°C		-10 ~ +110°C	

上記の表は4形式を比較した参考表となります。
◎非常に適している ○適している △あまり適していない ×適していない

深溝玉軸受

—開放形—

CADデータフォルダ名: 14_Bearings_with_Holder

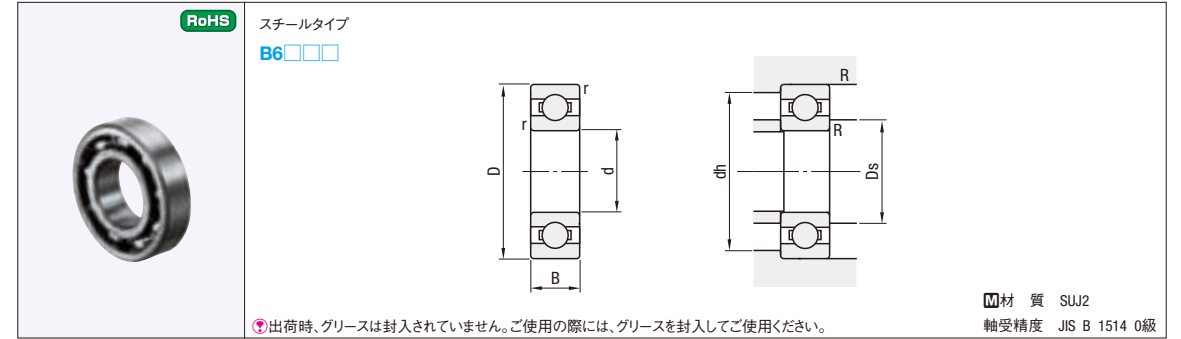

型式	d	D	B	r (min)	基本定格荷重		許容回転数 rpm (参考)	取付関係寸法			質量 (g) (参考)	¥基準単価			
					Cr (動) kN	Co (静) kN		Ds (min)	dh (max)	R (max)					
B6700	10	15	3	0.2	0.85	0.43	15000	10.4	11.21	14.2	0.2	2	450		
B6800		19	5	0.3	1.83	0.925	34000	12	12.5	17	0.3	5	290		
B6900			22		6	2.70	1.27		32000	13		20	9	310	
B6000	12	26	8	0.2	4.55	1.96	30000	12	13.5	24	0.3	19	190		
B6200		30	9	0.6	5.10	2.39	24000	14	16	26		0.6	32	160	
B6701			18	4	0.2	0.92	0.53		13000	12.4		13.86	16.7	0.2	3
B6801	15	21	5	0.3	1.92	1.04	32000	14	14.5	19	0.3	6	380		
B6901		24	6		2.89	1.46	30000		15	15		22	11	320	
B6001			28		8	5.10	2.39			28000		16	17	26	21
B6201	17	32	10	0.6	6.10	2.75	22000	16	17	28	0.6	37	180		
B6702		21	4	0.2	0.93	0.58	11000		15.4	16.86	19.7	0.2	4	510	
B6802			24	5	2.08	1.26	28000			17	17.5	22	0.3	7	420
B6902	28	7	3.65	2.00	26000	19	19	26	16		350				
B6002		32	9	5.60	2.83		24000	20	30		30	220			
B6202	19	35	11	0.6	7.75	3.60	20000	19	20	31	0.6	45	190		
B6803		26	5	0.3	2.23	1.46	26000		21	19.5	24	0.3	8	440	
B6903			30	7	4.65	2.58	24000			20	28		18	370	
B6003	20	35	10	0.3	6.80	3.35	22000	20.4	21	33	0.6	39	230		
B6203		40	12	0.6	9.60	4.60	17000		22	23		36	0.6	66	230
B6704			27	4	0.2	1.40	0.72			8500		22.36	25.5	0.2	6
B6804	25	32	7	0.3	4.00	2.47	22000	25	22.5	30	0.3	19	440		
B6904		37	9	0.3	6.40	3.70	19000		24	24		35	0.3	36	380
B6004			42	12	0.6	9.40	5.05			18000		26	38	0.6	69
B6204	30	47	14	1.0	12.80	6.65	15000	27	28	42	1.0	106	260		
B6805		37	7	0.3	4.30	2.95	18000		29	29	35	0.3	22	510	
B6905			42	9	7.05	4.55	16000			30	40		42	440	
B6005	35	47	12	0.6	10.10	5.85	15000	32	30.5	43	0.6	80	280		
B6205		52	15	1.0	14.00	7.85	13000		35	32	47	1.0	128	300	
B6806			42	7	0.3	4.70	3.65			15000	33	40	0.3	26	640
B6906	40	47	9	0.3	7.25	5.00	14000	37	34	45	0.6	48	500		
B6006		55	13	1.0	13.20	8.30	13000		39	37		50	1.0	116	340
B6206			62	16	1.0	19.50	11.30			11000		39	57	1.0	199
B6807	45	47	7	0.3	4.90	4.05	14000	40	38	45	0.3	29	770		
B6907		55	10	0.6	9.55	6.85	12000		42	40	51	0.6	74	580	
B6007			62	14	1.0	16.00	10.30			11000	42	57	1.0	155	420
B6207	50	72	17	1.1	25.70	15.30	9500	41.5	45	65.5	1.0	288	520		
B6808		52	7	0.3	5.10	4.40	12000		42	43		50	0.3	33	870
B6908			62	12	0.6	12.20	8.90			11000		44	45	58	0.6
B6008	55	68	15	1.0	16.80	11.50	10000	45	47	63	1.0	190	540		
B6208		80	18	1.1	29.10	17.80	8500		46.5	51	73.5	1.0	366	680	
B6010			16	1.0	21.80	16.60				55.0	57.5		75.0	261	810
B6210	90	20	1.1	35.00	23.20	7100	56.5	60.0	83.5	454	950				

Order 注文例: 型式 B6200

Delivery 出荷日: 在庫品 翌日出荷 P89

Price 価格: 数量スライド価格 (1円未満切り捨て) P89

数量	1~14	15~29	30~100
値引率	標準単価	5%	10%

kgf=N×0.101972

14 ベアリングホルダ