

# アルミ製L型アングル/樹脂等辺L型アングル

—素材切断Rなしフリー指定タイプ—



# L型アングル

—面切削直角度外側基準3辺等辺・2辺等辺タイプ—



● CADデータフォルダ名 : 58\_Angles


● 類似寸法は加工部品Cナビ <http://cp.misumi.jp/10-013/> ● CADデータフォルダ名 : 58\_Angles

## ■アルミ製RなしL型アングル



Type	材質
LRA	A6063

● L最大長の端面形状はメタルノコ切断のままです。  
● LRA6の場合、A・B寸法のいずれかが61mm以上の時、R=6になり、LRA12の場合、いずれかが101mm以上の時、R=12となります。

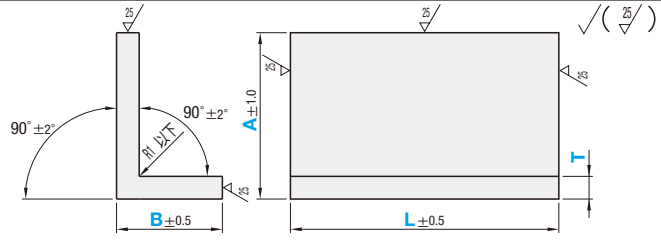

Type	T	T公差	A	B	L
LRA	3	±0.6	20~40	20~40	20~300
	5		20~50	20~50	
	6		20~70	20~70	
	8	±0.7	20~75	20~75	
	10		20~95	20~95	
	12		50~125	50~125	
14	±0.8	50~130	50~130		
18		100~155	100~155		

Order 注文例: 型式 - A - B - L  
LRA10 - A85 - B60 - L130

Delivery 出荷日: 3 日目発送

Price 価格: 数量スライド価格 (●1円未満切り捨て) P89

型式	T	A	B	¥基準単価					
				L20~50	L51~100	L101~150	L151~200	L201~250	L251~300
LRA	3	20~30	20~40	400	720	1,050	1,570	1,970	2,360
		31~40	20~40	450	820	1,200	1,780	2,210	2,630
		20~30	20~30	480	890	1,310	1,760	2,460	2,940
	5	20~30	20~30	620	1,110	1,660	2,220	3,050	3,650
		31~50	31~50	620	1,110	1,660	2,220	3,050	3,650
		20~30	31~50	720	1,300	1,940	2,580	3,600	4,310
	6	20~30	20~30	550	990	1,480	1,970	2,750	3,300
		31~50	20~30	690	1,220	1,830	2,440	3,390	4,070
		51~70	20~30	790	1,570	2,340	3,120	4,340	5,200
	8	20~30	20~30	690	1,220	1,830	2,440	3,390	4,070
		31~50	31~50	740	1,350	2,000	2,660	3,700	4,440
		51~70	51~70	850	1,680	2,510	3,330	4,630	5,570
10	20~30	20~30	790	1,570	2,340	3,120	4,340	5,200	
	31~50	51~70	850	1,680	2,510	3,330	4,630	5,570	
	51~70	51~70	980	1,940	2,880	3,850	5,340	6,410	
12	20~30	20~30	690	1,340	2,000	2,660	3,310	3,970	
	31~50	20~30	740	1,440	2,160	2,860	3,570	4,270	
	51~75	20~30	790	1,540	2,300	3,060	3,810	4,570	
14	20~30	31~50	740	1,440	2,160	2,860	3,570	4,270	
	31~50	31~50	770	1,510	2,260	3,000	3,730	4,470	
	51~75	51~75	810	1,610	2,400	3,200	3,990	4,770	
18	20~30	51~75	870	1,710	2,560	3,400	4,240	5,090	
	31~50	20~30	870	1,700	2,520	3,340	4,190	5,020	
	51~75	20~30	910	1,800	2,690	3,580	4,460	5,330	

Alteration 追加加工

型式 - A - B - L - L (CCA-etc.)  
LRA10 - A85 - B60 - L130 - CCA5 - CCD5

Corner Cut: CCA, CCB, CCC, CCD

Code: CCA · CCB · CCC · CCD


Spec. 任意のコーナーをカットすることができます。1≦コーナーカット≦30 1mm単位指定

## ■樹脂等辺L型アングル



Type	材質
LACJ	ナイロン6

● 押出し成形のため、樹脂の特性上1mに対し、15mm程度の反りがあります。

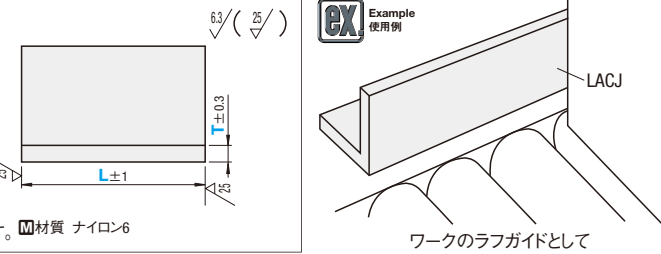


型式	T	A	L	¥基準単価									
				L50~100	L101~200	L201~300	L301~400	L401~500	L501~600	L601~700	L701~800	L801~900	L901~1000
LACJ	6	30	50~1000	660	900	1,200	1,500	1,650	1,950	2,250	2,550	2,850	3,000
		50	50~1000	960	1,440	1,920	2,400	2,640	2,880	3,360	3,840	4,320	4,800

Order 注文例: 型式 - A - L  
LACJ6 - A50 - L200

Delivery 出荷日: 3 日目発送

Price 価格: 数量スライド価格 (●1円未満切り捨て) P89

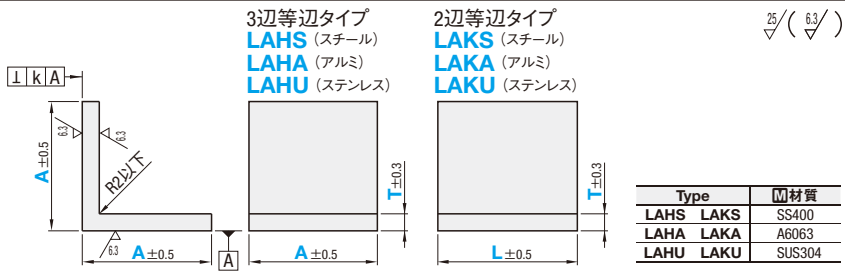

3辺等辺タイプ

型式	T	k	直角度	LAHS		LAHA		LAHU	
				¥基準単価	¥スライド単価	¥基準単価	¥スライド単価	¥基準単価	¥スライド単価
LAHS LAHA LAHU	25 30 50	5 6 6	0.05	1~14	15~	1~14	15~	1~14	15~
				730	660	600	540	1,770	1,590
				840	760	710	640	1,850	1,660
LAHS LAHA LAHU	75	5 6 6	0.1	1~14	15~	1~14	15~	1~14	15~
				1,250	1,120	1,130	1,020	2,710	2,450
				1,570	1,410	1,380	1,250	3,030	2,720
LAHS LAHA LAHU	100	5 6 6	0.1	1~14	15~	1~14	15~	1~14	15~
				2,140	1,920	1,720	1,550	4,400	3,960
				2,860	2,570	2,800	2,520	4,480	4,030
LAHS LAHA LAHU	125	5 6 6	0.1	1~14	15~	1~14	15~	1~14	15~
				4,150	3,740	3,980	3,590	-	-
				5,470	4,920	-	-	-	-

Order 注文例: 型式 - T  
LAHS50 - 10

Delivery 出荷日: 在庫品 翌日出荷 P89

●ご希望によりPM5:00迄、当日出荷受付致します。

2辺等辺タイプ

型式	A	L						T		k	直角度					
		25	30	40	50	60	70	80	100			150	5	6		
LAKS LAKA LAKU	25	30	40	50	60	70	80	100	150	5	6	0.05	0.1			
		40	50	60	70	80	100	150	5	6	*8			*10		
		50	30	40	50	60	70	80	100	150	5			6	*8	*10
LAKS LAKA LAKU	40	30	40	50	60	70	80	100	150	5	6	0.05	0.1			
		50	30	40	50	60	70	80	100	150	5			6	*8	*10
		60	30	40	50	60	70	80	100	150	5			6	*8	*10
LAKS LAKA LAKU	60	30	40	50	60	70	80	100	150	5	6	0.05	0.1			
		75	30	40	50	60	70	80	100	150	5			6	*8	*10
		100	40	50	60	70	80	150	10	10						
LAKS LAKA LAKU	100	40	50	60	70	80	150	10	10	10	0.1	0.1				
		50	60	70	80	100	150	10	10							
		125	50	60	70	80	100	150	10	10						

Order 注文例: 型式 - L - T  
LAKS50 - 80 - 5

Delivery 出荷日: 3 日目発送

ストークA 500円/1本 P99

●同一サイズ3本以上は一律1,350円

Price 価格: 数量スライド価格 (●1円未満切り捨て) P89

型式	A	T	¥基準単価															
			L30	L40	L50	L60	L70	L80	L100	L150	L30	L40	L50	L60	L70	L80	L100	L150
LAKS LAKA	25	5	960	1,130	1,320	1,510	1,690	1,870	2,280	3,280	810	990	1,150	1,310	1,480	1,670	1,980	2,780
		6	-	1,190	1,380	1,560	1,760	1,940	2,320	3,290	-	1,050	1,200	1,360	1,550	1,740	2,100	2,950
		10	1,050	-	1,440	1,620	1,830	2,010	2,420	3,490	970	-	1,310	1,500	1,690	1,890	2,290	3,200
LAKS LAKA	40	5	1,290	-	1,770	2,010	2,260	2,490	2,990	4,240	1,260	-	1,760	1,980	2,250	2,510	3,020	4,290
		6	1,090	1,270	-	1,670	1,860	2,040	2,440	3,500	990	1,170	-	1,510	1,720	1,910	2,320	3,210
		10	1,320	1,560	-	2,040	2,290	2,530	3,020	4,270	1,270	1,530	-	1,990	2,250	2,520	3,060	4,320
LAKS LAKA	60	5	1,330	1,570	1,810	-	2,320	2,560	3,060	4,310	1,190	1,410	1,620	-	2,050	2,270	2,700	3,810
		6	1,790	2,150	2,510	-	3,240	3,590	4,320	6,090	1,740	2,100	2,440	-	3,150	3,510	4,230	5,990
		10	1,380	1,610	1,850	2,100	2,340	2,590	3,070	4,290	1,220	1,440	1,650	1,870	2,080	2,300	2,730	3,840
LAKS LAKA	75	5	1,820	2,180	2,540	2,900	3,270	3,620	4,360	6,120	1,790	2,130	2,470	2,830	3,180	3,540	4,260	6,020
		6	2,440	2,820	3,200	3,670	4,070	4,750	5,280	6,810	-	2,480	2,850	3,290	3,710	4,150	-	7,050
		10	-	-	-	3,310	3,580	4,140	4,550	5,560	7,960	-	-	-	-	-	-	-

Alteration 追加加工

型式 - L - T (CKC-CCA-CCB-etc.)  
LAKS50 - 60 - 10 - CKC

型式	A	T	¥基準単価							
			L30	L40	L50	L60	L70	L100	L150	
LAKU	25	5	2,020	2,480	2,930	3,390	3,870	4,320	5,250	7,560
		6	-	2,560	3,020	3,480	3,930	4,400	5,330	7,630
		10	2,160	-	3,070	3,530	4,000	4,450	5,380	7,690
LAKU	40	5	2,330	-	3,320	3,800	4,300	4,810	5,800	8,300
		6	2,280	2,730	-	3,640	4,120	4,590	5,500	7,820
		10	2,440	2,930	-	3,900	4,410	4,910	5,920	8,400
LAKU	60	5	2,340	2,810	3,260	-	4,170	4,640	5,590	7,900
		6	2,480	2,970	3,460	-	4,450	4,960	5,990	8,450
		10	2,650	3,180	3,700	4,230	4,750	5,280	6,390	9,010
LAKU	75	5	2,840	3,340	3,860	4,380	4,910	5,430	6,510	9,090
		6	-	-	-	-	-	-	-	-
		10	-	-	-	-	-	-	-	-

Alteration 追加加工

Corner Cut: CCA, CCB, CCC, CCD

Inner Angle Guarantee: FC

Side Angle Guarantee: CKC

Spec. 任意のコーナーをカットすることができます。1≦コーナーカット≦30 1mm単位指定

指定方法: (例)AとDのコーナーをC5でカットする場合→CCA5-CCD5

●LAHUは適用不可です。

58 アングル 形鋼材