




● CADデータフォルダ名: 23_Locating_&_Guide_Components ■特長:スペースの無いところでも使用できる様にコンパクトタイプもございます。



Ty	pe	□□材質	S表面処理
H寸選択	H寸指定	凹物貝	乙
AJKC	AJKB	一般	四三酸化鉄皮膜
AJKCM	AJKBM	構造用鋼	無電解ニッケルメッキ
AJKCS	_	SUS304	_



	型式							н													3	/基準単 個	ĺ	
	空式				18	・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・	ノプ				指定タイプ	d	H ₁	Т	W	Р	d2	d1	l	H3	寸選択タイ	プ	H寸指》	定タイプ
Туј	ре	No.			12	ミハブ	17				指定1mm単位									AJKC	AJKCM	AJKCS	AJKB	AJKBM
		3	5		10		15					2.5	5	7	26	16	3.5	6	3.5	700	920	1,370	1,060	1,270
(H寸選択)	(H寸指定)	4	5		10)	15	20]	3.5	3	_ ′ _	20	10	3.3	0	3.3	700	920	1,370	1,060	1,270
AJKC	AJKB	5		6 10 15 20 25				10~40	4.5	6	9	32	20	4.5	8 4	4.5	760	1,000	1,480	1,120	1,350			
AJKCM	AJKBM	6			3 10)	15	20	25	30]	5.5	0	9	32	20	4.5	0	4.5	760	1,000	1,480	1,120	1,350
AJKCS		8			10)	15	20	25	30	i i		8	12	38	26	5.5	9.5	5.5	880	1,160	1,800	1,240	1,410
(No.3~10)		10		12 15 20 25 30		30	9		10	16	50	32				1,200	1,590	2,470	1,570	1,940				
		12	12 15 20 25 30		15~80	11.5	-11		GE.		9	14	9	1,330	1,770	_	1,710	2,120						
		16		15 20 25 30		1	15.5	111 1	19	65	40				1,470	1,950	_	1,850	2,300					










Ty	ре	□材質	S表面処理
H寸選択	H寸指定	凹材貝	5 衣 山 处 珪
AJSC	AJSB	一般	四三酸化鉄皮膜
AJSCM	AJSBM	構造用鋼	無電解ニッケルメッキ
AJSCS	_	SUS304	_




型式			Н													j.	基準単個	i	
至政				選択タイプ	r e		指定タイプ	d	H ₁	Т	w	Р	H ₂	d1		H寸選択		H寸:	指定
Туре	No.			送扒ブイノ		指定1mm単位								AJSC	AJSCM	AJSCS	AJSB	AJSBM	
(i. 1)224E)	3	15	20					2.5	- 5	7	26	16	4	4	490	760	910	800	930
(H寸選択) AJSC	4	15					3.5) 3	1	20	10	4	4	490	760	910	800	930	
AJSCM	5	15	20				10~40	4.5		9	32	20	5	6	520	800	970	830	970
AJSCS	6	15	20	25	30]	5.5	0	9	32	20	5	O	520	800	970	830	970
(U-1464)	8		20	25	30	40]	7.5	8	12	38	26	6	7	750	980	1,400	1,040	1,240
(H寸指定) AJSB	10			25	30	40		9.5	10	16	50	32	9	9.5	930	1,210	1,720	1,200	1,450
AJSBM	12			25	30	40	15~80	11.5	-11	10	65			11.5	1,180	1,570	_	1,440	1,770
	16			25	30	40		15.5	11	19	65	40	12	11.5	1,360	1,790	_	1,600	1,970














Type	₩材質	S 表面処理
AJSCC	一般	四三酸化鉄皮膜
AJSCCM	構造用鋼	無電解ニッケルメッキ
AJSCCS	SUS304	_



型式			H選択						-	14/	ь	H ₂	al.		¥基準単価	
Туре	No.			口进扒			d	H ₁	٠.	W	P	П2	d1	AJSCC	AJSCCM	AJSCCS
1,1000	4	15	20				3.5	5	3	25	16	4	4	540	820	1,090
AJSCC AJSCCM	5	15	20	25			4.5	6		32	20	_	c	570	860	1,160
AJSCCM	6	15	20	25	30		5.5	В	5	32	20	3	O	570	860	1,160
A03003	8		20	25	30	40	7.5	8		38	26	6	7	820	1,060	1,680

 夕 A早割
 翌日出荷
 500円/明細行
 PM 3:00迄

 一ク A
 翌日出荷
 500円/1本
 PM 6:00迄

※無電解ニッケルメッキ品はストークA早割、ストークA適用不可

2 日目出荷 3 日目出荷



1 -1779




-L型タイプ・L型側面取付タイプ-

 CADデータフォルダ名: 23_Locating_&_Guide_Components ■特長:安定性に優れたL型タイプで2種類(スタンダード・側面)を取り揃えております。

S表面処理

四三酸化鉄皮膜





型式			Н															¥基準	当価										
至氏			.552	択タイ	- 2		指定タイプ	d	H ₁	Т	W	P	L	В	T ₁	d2	d1	l		+25+	- -								
Type	No.		进	ハメコ	_		指定1mm単位												AJLC	AJLCM	AJLB	AJLBM							
(H寸選択)	3	15	20				16~40	2.5	-	7	26	16	16	11	7	3.5	6	3.5	1,380	1,790	1,880	2,290							
	4	15	20		10~40	3.5) 3	'	20	10	10		'	3.5	0	3.5	1,380	1,790	1,880	2,290									
AJLC	5		20	25				4.5	c	9	32	20	23	16	9	4.5	8	4.5	1,440	1,870	1,940	2,370							
AJLCM	6		20	25	30		21~40	5.5	0	9	32	20	23	10	9	4.5	0	4.5	1,440	1,870	1,940	2,370							
(H寸指定)	8		20	25	30		1	7.5	8	12	38	26	28	20	10	5.5	9.5	5.5	1,670	2,170	2,170	2,670							
AJLB	10				30	35	35 9.5 1				ç	ç	ç	9	9.5	10	16	50	32	38	27					2,340	3,040	2,840	3,540
AJLBM	12				30	35		-11	19	65			30	15	9	14.0	9	2,610	3,390	3,110	3,890								
AULDIVI	16				30	35		15.5	111	19	00	40	41	30					2,930	3,810	3,430	4,310							
	ALIC AUR					AAUC AUD	スのひ																						










刑士






										l W		l dı		В			
Type	No.			H選択			d	H ₁		VV	P	u1	T1	Р	AJSLC	AJSLCM	AJSLCS
	3	15	20				2.5	-	7	26	16	1	1	- 5	1,280	1,560	2,060
	4	15	20				3.5	ا ا	<i>'</i>	20	10	4	4)	1,280	1,560	2,060
AJSLC	5	15	20 25				4.5	6	0	32	20	6		G	1,390	1,640	2,180
AJSLCM	6	15	20	25	30		5.5	6	9	32	20	6	5	6	1,390	1,640	2,180
	8	3 20 25 30 4		40	7.5	8	12	38	26	7	6	8	1,570	1,900	2,620		
AJSLCS	10			25	30	40	9.5	10	16	50	32	9.5	7	9	2,220	2,640	3,290
	12			25	30	40	11.5	11	19	65	40	11.5	8	10	2,330	2,810	4,000
	16			25	30	40	15.5	11	19	00	40	11.5	°	10	2,600	3,120	4,580
Order	- П		Delivery	3 💵	出港						Price	数量ス	スライド個		i切り捨て) P.127		
		H Delivery 3 目目出荷													加加州大		



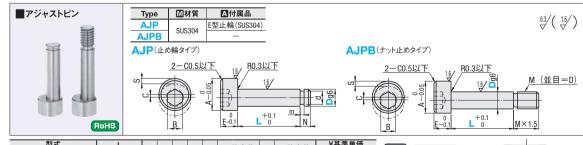

-				Α	В		С	S							IIII	
Type		D _g 6	指定1mm単位	A	Р	Е		3	III	許容差	N	u i	許容差	AJP	AJPB	
AJP	3	-0.002 -0.008	5(10) ~20	5.5	2.5	3.5	0.5	1	0.5	+0.05 0		2	+0.06	550	830	Į
AJP	4	0.004	5(10) ~25	7	3	4.5	0.7	1.4		101	2	3	U	700	1,040	
	5	-0.004 -0.012	10~30	8.5	4	5.5	1	2	0.7	+0.1		4	+0.075	800	1,070	
AJPB (L≧10)	6	-0.012	10~35	10	5	6.5	1.3	2.6		U		5	0	950	1,210	
(L≦10)	8	-0.005 -0.014	10~40	13	6	8.5	1.6	3.2	0.9	+0.14 0	3	7	+0.09 0	1,100	1,350	





AJP	3 –	6	-6-6	<u> </u>		・プストークA早割は1明細行当たり一律300円
数量ス	ライド価	格 (1円	未満切り捨	て) P.127		・プストークAは3本以上で1明細行当たり一律810円
数量区分		標準	対応		個別対応	
数里区万		小			大口	
数量	1~29	30~39	40~49	50~100	101~	
値引率	基準単価	5%	10%	18%	お見積り	
出荷日		通	常		の処例の	
●主示器4	# +2 -> / + M/O	ニーププロ会会	ノゼさい			

可動側に長円形状加工をし、アジャストピンを回して位置を微 出荷 300円/1本 PM 6:00迄 ► P.128 調整します。 アジャストピン自体には固定する機能はありません。

AJP (止め輪タイプ) はピン本体を固定することができませんが、 AJPB(ボルトタイプ)はナット(3種)を使用し、ダブルナットにする ことで固定できます。