


型式

| Type | No. | 適応ホース呼び内径 | T (PT) | D | HOSN | | | HOSNS | | | HOSN | | HOSNS | | | | |
|------|-------|-----------|--------|-----|------|----|-----|-------|----|----|------|-------|--------|-------|--------|-------|-------|
| | | | | | d | H | L | d | H | L | L1 | 1~19コ | 20~50コ | 1~19コ | 20~30コ | | |
| HOSN | 61 | 1/8 | | 7 | 4 | 12 | 34 | 20 | 4 | 12 | 36 | 20 | 130 | 80 | 500 | 470 | |
| | 62 | 1/4 | | | 4 | 14 | 41 | 26 | 4 | 14 | 42 | 24 | 150 | 90 | 600 | 510 | |
| | 63 | 3/8 | | | 4 | 17 | 46 | 29 | 4 | 17 | 44 | 25 | 180 | 130 | 650 | 600 | |
| | 64 | 1/2 | | | 3.5 | 22 | 50 | 29 | 4 | 22 | 49 | 27 | 240 | 210 | 1,070 | 790 | |
| | 628 | 1/4 | 8 | 4.5 | 14 | 41 | 26 | 5 | 14 | 42 | 24 | | 360 | 270 | 760 | 640 | |
| | 629 | 1/4 | 9 | 5 | 14 | 41 | 26 | 5 | 14 | 42 | 24 | | 360 | 270 | 760 | 640 | |
| | 91 | 1/8 | | | 6 | 12 | 34 | 20 | 6 | 12 | 36 | 20 | 140 | 90 | 600 | 510 | |
| | 92 | 1/4 | | | 7 | 14 | 41 | 26 | 6 | 14 | 42 | 24 | 150 | 90 | 500 | 470 | |
| | 93 | 3/8 | | | 7 | 17 | 46 | 29 | 6 | 17 | 44 | 25 | 170 | 120 | 520 | 490 | |
| | 94 | 1/2 | | | 6 | 22 | 50 | 29 | 7 | 22 | 49 | 27 | 230 | 190 | 900 | 790 | |
| | 12412 | 1/2 | 12 | 7.5 | 22 | 50 | 29 | 8 | 22 | 49 | 27 | | 450 | 330 | 950 | 800 | |
| | 122 | 1/4 | | | 9 | 14 | 41 | 26 | 8 | 17 | 42 | 24 | | 170 | 110 | 600 | 570 |
| | 123 | 3/8 | 14 | | 10 | 17 | 46 | 29 | 9 | 17 | 44 | 25 | | 180 | 130 | 600 | 570 |
| | 124 | 1/2 | | | 10 | 22 | 50 | 29 | 11 | 22 | 49 | 27 | | 220 | 180 | 750 | 710 |
| | 153 | 3/8 | 16 | | 11.5 | 17 | 46 | 29 | 11 | 17 | 44 | 25 | | 460 | 390 | 820 | 690 |
| | 154 | 1/2 | | | 11 | 22 | 50 | 29 | 12 | 22 | 49 | 27 | | 500 | 420 | 940 | 790 |
| | 19619 | 3/4 | 19 | | 13 | 27 | 60 | 36 | 14 | 27 | 59 | 33 | | 750 | 630 | 1,430 | 1,210 |
| | 194 | 1/2 | | | 14 | 22 | 50 | 29 | 15 | 22 | 49 | 27 | | 270 | 220 | 900 | 790 |
| | 196 | 3/4 | 20.5 | | 15 | 27 | 60 | 36 | 15 | 27 | 59 | 33 | | 360 | 310 | 1,270 | 920 |
| | 258 | 25 | 1 | 27 | 20.5 | 35 | 74 | 42 | 22 | 35 | 70 | 40 | | 850 | 750 | 1,510 | 1,380 |
| | 3812 | 38 | 1 1/2 | 40 | 30 | 51 | 100 | 61 | 31 | 52 | 90 | 53 | | 2,060 | 1,900 | 2,270 | 2,110 |
| | 5016 | 50 | 2 | 52 | 40 | 63 | 132 | 86 | 43 | 63 | 100 | 60 | | 3,550 | 3,310 | 2,980 | 2,780 |


①表示数量超えはWOSにてご確認ください。

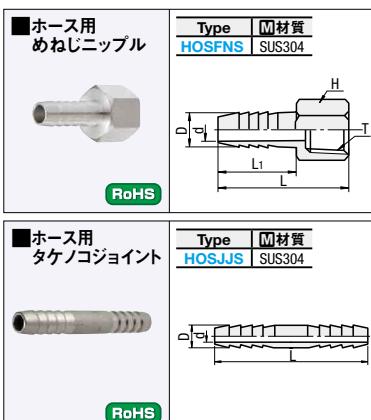

型式

| Type | No. | 適応ホース呼び内径 | Rc (PT) | D | d | H | L | L1 | ¥基準単価 | ¥スライド単価 |
|--------|-----|-----------|---------|------|------|--------|----|----|-------|---------|
| | | | | | 1~9コ | 10~30コ | | | | |
| HOSFNS | 62 | 6 | 1/4 | 7.0 | 4.0 | 17 | 45 | 26 | 910 | 720 |
| | 92 | 9 | 1/4 | | | 17 | 45 | 26 | 910 | 720 |
| | 93 | 3/8 | | 10.5 | 7.0 | 22 | 49 | 28 | 1,130 | 900 |
| | 94 | 1/2 | | | 24 | 54 | 29 | | 1,130 | 900 |
| | 123 | 3/8 | 14 | 10.0 | | 22 | 49 | 28 | 1,380 | 1,100 |
| | 124 | 1/2 | | | 24 | 54 | 29 | | 1,380 | 1,100 |


①表示数量超えはWOSにてご確認ください。

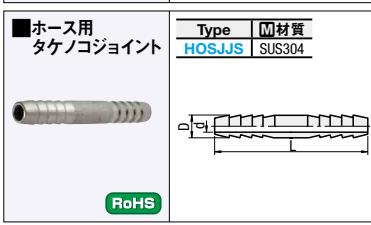

型式

| Type | No. | 適応ホース呼び内径 | D | d | L | ¥基準単価 | ¥スライド単価 |
|--------|-----|-----------|------|--------|----|-------|---------|
| | | | 1~9コ | 10~30コ | | | |
| HOSJJS | 6 | 6 | 7.0 | 4.0 | 55 | 1,270 | 1,200 |
| | 9 | 9 | 10.5 | 8.0 | 70 | 1,270 | 1,200 |
| | 12 | 12 | 14.0 | 10.0 | 75 | 1,720 | 1,630 |
| | 19 | 19 | 20.5 | 16.0 | 90 | 3,470 | 3,290 |


①表示数量超えはWOSにてご確認ください。

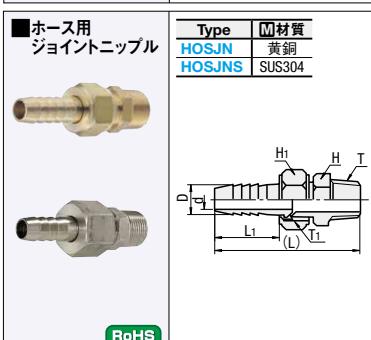


型式

| Type | No. | 適応ホース呼び内径 | T (PT) | D | T ₁ G(PF) | d | H | H ₁ | (L) | L ₁ | ¥基準単価 | ¥スライド単価 |
|-------|-----|-----------|--------|------|----------------------|--------|--------|----------------|--------|----------------|-------|---------|
| | | | | | 1~9コ | 10~30コ | 1~9コ | 10~30コ | | | | |
| HOSJN | 61 | 1/8 | | 7.0 | 1/8 | 4.0 | 12 | 12 | 43 | 19 | 390 | 270 |
| | 62 | 1/4 | | | 1/4 | 4.0 | 14 | 16 | 59 | 26 | 400 | 280 |
| | 63 | 3/8 | | | 1/4 | 4.0 | 17 | 16 | 60 | 26 | 440 | 300 |
| | 628 | 1/4 | 8 | 1/4 | 4.5 | 14 | 16 | 59 | 26 | 520 | 390 | — |
| | 629 | 1/4 | 9 | 1/4 | 5 | 14 | 16 | 59 | 26 | 520 | 390 | — |
| | 92 | 1/4 | | | 3/8 | 7.0 | 17 | 19 | 57 | 27 | 520 | 360 |
| | 93 | 3/8 | 10.5 | 3/8 | 7.0 | 17 | 19 | 60 | 27(25) | 27 | 520 | 360 |
| | 94 | 1/2 | | | 3/8 | 7.0 | 22 | 19 | 63 | 27 | 680 | 470 |
| | 123 | 3/8 | 12 | 1/2 | 10.0 | 22 | 24 | 71 | 31 | 680 | 470 | — |
| | 124 | 1/2 | 14.0 | 1/2 | 10.0 | 22 | 24 | 73(69) | 31(27) | 730 | 510 | 3,370 |
| | 126 | 3/4 | | 1/2 | 10.0 | 28 | 24 | 77 | 31 | 1,260 | 880 | — |
| | 153 | 3/8 | 15 | 1/2 | 11.5 | 22 | 24 | 71 | 31 | 760 | 570 | — |
| | 154 | 1/2 | | 1/2 | 11.5 | 22 | 24 | 73 | 31 | 760 | 570 | — |
| | 194 | 1/2 | 20.5 | 3/4 | 15.0 | 28 | 30 | 78 | 35 | 1,300 | 910 | — |
| | 196 | 3/4 | 3/4 | 15.0 | 28(29) | 30 | 82(80) | 35(33) | 1,350 | 940 | 4,800 | 3,600 |

①表示数量超えはWOSにてご確認ください。

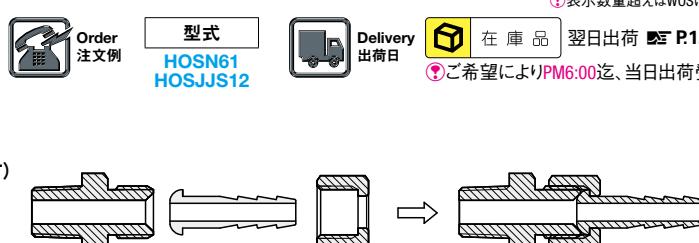

- ①ホースナットにホース口をはめ込んでください。
- ②ホース口R面(シート面)を本体内面にあててください。
- ③ホースナットを手締めしてください。
- ④スパンナ及びモンキーレンチ等でぎっしりと締めこんでください。

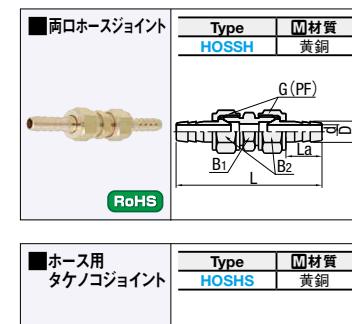

型式

| Type | No. | 適応ホース呼び内径 | D | d | B1 | B2 | G (PF) | La | L | ¥基準単価 | ¥スライド単価 |
|---------|-----|-----------|------|-------|----|----|--------|----|---|-------|---------|
| | | | 1~4コ | 5~10コ | | | | | | | |
| HOSSH</ | | | | | | | | | | | |