アルミ製L型アングル

-素材切断Rなしフリー指定タイプー





ANGLES -FACE MILLING PERPENDICULARITY OUTER SIDE BASIS THREE SIDES EQUILATERAL / TWO SIDES EQUILATERAL -

L型アングル


-面切削直角度外側基準3辺等辺・2辺等辺タイプー




☑材質


SS400



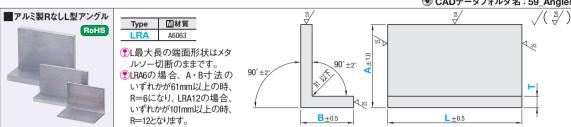

型式		T公差	指	Order		
Туре	Type T		Α	В	L	注文例
	3	±0.6	20~40	20~40		
	5		20~50	20~50		Delive 出荷日
	6	⊥ 0.7	20~70	20~70	20~300	۳
LDA	8	±0.7	20~75	20~75		
LRA	10		20~95	20~95		
	12	±0.8	50~125	50~125		Price 価格
	14	0.0	50~130	50~130	51~300	
	18		100~155	100~155		






■数量スライド価格 (・1円未満切り捨て) P.127									
数量区分		個別対応							
数里区ガ		小口		大口	大口				
数量	1~9	10~19	20~49	50~80	81~				
値引率	基準単価	5%	10%	10%	お見積り				
出荷日		通常		+7日	の兄領り				

・表示数量超えはWOSにてご確認ください。

コーナーカット

高さ面ト

底裏面

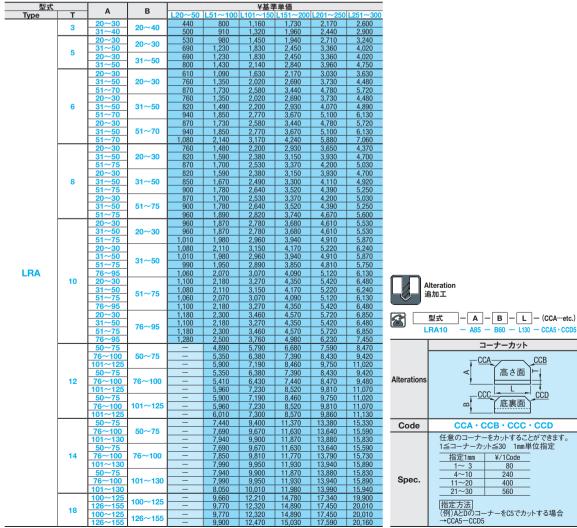









型式

LAHS50


Order 注文例

出荷日

|-| T

☆ 在庫品 翌日出荷 № P.127

|-| L |-| T





●3本以上で1明細行当たり一律1,350円



4-11#	型式		¥基準単価															
至式			LAKS								LAKA							
Type	Α	選択	L30	L40	L50	L60	L70	L80	L100	L150	L30	L40	L50	L60	L70	L80	L100	L150
	25	5 6	960	1,130	1,320	1,510	1,690	1,870	2,280	3,280	810	990	1,150	1,310	1,480	1,670	1,980	2,780
	30	5 6	_	1,190	1,380	1,560	1,760	1,940	2,320	3,290	_	1,050	1,200	1,360	1,550	1,740	2,100	2,950
	40	5 6	1,050	_	1,440	1,620	1,830	2,010	2,420	3,490	970	_	1,310	1,500	1,690	1,890	2,290	3,200
	40	10	1,290	_	1,770	2,010	2,260	2,490	2,990	4,240	1,260	-	1,760	1,980	2,250	2,510	3,020	4,290
LAKS	50	5 6	1,090	1,270	-	1,670	1,860	2,040	2,440	3,500	990	1,170	_	1,510	1,720	1,910	2,320	3,210
		10	1,320	1,560	_	2,040	2,290	2,530	3,020	4,270	1,270	1,530	_	1,990	2,250	2,520	3,060	4,320
LAKA	60 5 6	5 6	1,330	1,570	1,810	_	2,320	2,560	3,060	4,310	1,190	1,410	1,620	_	2,050	2,270	2,700	3,810
	60	10	1,790	2,150	2,510	_	3,230	3,590	4,320	6,090	1,740	2,100	2,440	_	3,150	3,510	4,230	5,990
	75	5 6	1,360	1,610	1,850	2,100	2,340	2,590	3,070	4,290	1,220	1,440	1,650	1,870	2,080	2,300	2,730	3,840
	/5	10	1,820	2,180	2,540	2,900	3,270	3,620	4,360	6,120	1,790	2,130	2,470	2,830	3,180	3,540	4,260	6,020
	100	10	_	2,440	2,820	3,250	3,670	4,070	_	6,810	_	2,480	2,850	3,290	3,710	4,150	_	7,050
LAKS	125	10	_	_	3,310	3,580	4,140	4,550	5,560	7,960	_	_	_	_	-	_	_	_
力士		т		A套索束哩							·					·		

LAKS	125	10			3,310	3,300	4,140	4,550	5,560	7,960		
		_	Y基準単価									
型式	型式		LAKU									
Type	Α	選択	L30	L40	L50	L60	L70	L80	L100	L150		
	25	5 6	2,020	2,480	2,930	3,390	3,860	4,320	5,250	7,560		
	30	5 6	_	2,560	3,020	3,480	3,930	4,400	5,330	7,630		
	40	5 6	2,160	_	3,070	3,530	4,000	4,450	5,380	7,690		
		8	2,330	_	3,320	3,800	4,300	4,810	5,800	8,300		
LAIZII		5 6	2,280	2,730	-	3,640	4,120	4,590	5,500	7,820		
LAKU	50	8	2,440	2,930	-	3,900	4,410	4,910	5,920	8,400		
	60	5 6	2,340	2,810	3,260	_	4,170	4,640	5,590	7,900		
	60	8	2,480	2,970	3,460	_	4,450	4,960	5,990	8,450		
	75	5 6	2,650	3,180	3,700	4,230	4,750	5,280	6,390	9,010		
	/5	8	2,840	3,340	3,860	4,380	4,910	5,430	6,510	9,090		



	コーナーカット	内側直角度保証	側面直角度保証		
Alterations	CCA 高さ面 CCB CCD CCC L CCD	PINIE PAR KAIL LIKA SS B A A	10.05A - 10.05A - 10.05A - 10.05A		
Code	CCA · CCB · CCC · CCD	FC	CKC		
Spec.	任意のコーナーをカットすることができます。 指定1mm V/1Code 1 ~ 3 80 1 1 ~ 3 80 1 1 ~ 3 80 1 1 ~ 3 80 1 1 ~ 3 80 1 1 ~ 3 80 1 1 ~ 3 80 1 1 ~ 3 80 1 1 ~ 20 1 1 1 ~ 20 4 0 1 1 1 ~ 20 4 0 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 ~ 20 8 1 1 1 ~ 20 8 1 1 1 ~ 20 8 1 1 1 ~ 20 8 1 1 1 ~ 20 8 1 1 1 ~ 20 8 1 1 1 ~ 20 8 1 1 1 ~ 20 8 1 1 1 ~ 20 8 1 1 1 ~ 20 8 1 1 1 1 ~ 20 8 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	基準面Aに対する内側垂直 面の直角度を保証します。 指定方法 FC	A面に対するL寸法両面の直角加工を します。 <u>指定方法</u> CKC <mark>⊗LAH□は適用不可です。</mark>		
¥/1Code	Spec.参照	Spec.参照	800		