

六角穴付ボルト/カバーキャップ

-細目タイプ/左ねじタイプ-

◎ CADデータフォルダ名: 34_Screws



Type	材質	表面処理	硬度	強度区分
CBPK	SCM435	四三酸化鉄皮膜	39~44HRC	12.9
SCBPK	SUS304相当	-	-	A2-70




型式	MxP	ℓ	A	E	B	CBPK		SCBPK	
						¥基準単価	¥スライド単価	¥基準単価	¥スライド単価
Type M-L						1~9本	10~100本	1~9本	10~100本
CBPK 6-10	6					190	120	230	190
SCBPK 12	6 × 0.75	全ねじ	10	6	5	190	120	230	190
15						190	120	230	190
20						220	150	250	210
25						220	150	250	210
CBPK 8-12	8					190	120	230	190
SCBPK 15	8 × 1.0	全ねじ	13	8	6	190	120	230	190
20						220	150	250	210
25						220	150	250	210
30						220	150	250	210
CBPK 10-15	10					220	150	260	220
SCBPK 20	10 × 1.25	全ねじ	16	10	8	220	150	260	220
25						220	150	260	220
30						240	170	280	240
35						240	170	280	240
40						240	170	280	240
45						260	190	300	250
50						260	190	300	250
CBPK 12-20	12					240	170	280	240
SCBPK 25	12 × 1.25	全ねじ	18	12	10	240	170	280	240
30						240	170	280	240
35						240	170	280	240
40						260	190	320	260
50						260	190	380	320

※SCBPKは全ねじになります。



数量区分	標準対応		個別対応
	小口	大口	
1~100	1~100	101~	
出荷日	通常	お見積り	
			表示数量超えはW05にてご確認ください。

型式	適用 ボルト	MTCSW(白)		MTCSB(黒)		MTCSC(透明)		M	D ₂ 公差	R
		M	D ₂	M	D ₂	M	D ₂			
MTCSW	(黒)								+0.3	
MTCSC	(白)								+0.4	
MTCSC	(透明)								+0.5	

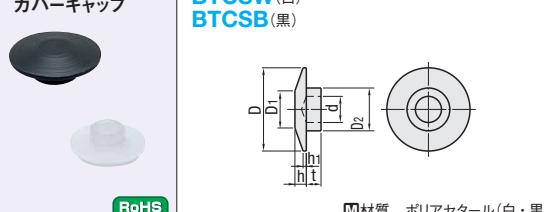

型式	適用 ボルト	¥基準単価		BTCSW		BTCSB		BTCSW		BTCSB
		M	D ₂	BTCSW	BTCSB	BTCSW	BTCSB	BTCSW	BTCSB	BTCSW
3	M3	4.5	1.5	2.5	+0.15	1.5	1	0.3	1	45
4	M4	6	2	3	+0.20	2	1.1			50
5	M5	7.5	3	4	+0.10	3	1.3			50
6	M6	9	4	5	+0.10	4	1.5	0.4	1.5	55
8	M8	12	5	6	+0.25	4.5	1.8	0.5	2.3	60
10	M10	15	6	8	+0.15	6.5	2	0.6	2.9	70
12	M12	17	8	10		8.5	2.2	0.6	3.5	80



型式	適用 ボルト	¥基準単価		MTCSC		MTCSC		MTCSC		MTCSC
		M	D ₂	MTCSC						
3	M3	9	7	2.5	1	1	0.2	1.2	90	
4	M4	10	8	3	1.5	1	0.2	1.7	90	
5	M5	12	9.5	4	2.5	1	0.2	2.2	90	
6	M6	14	11	5	3.5	1.3	0.3	2.7	120	
8	M8	17	13.5	6	4.8	1.5	0.3	3.5	120	
10	M10	21	16	8	6.5	2	0.4	4	140	
12	M12	23	17	10	8.5	2.5	0.5	5	140	

