-材質SUS304 / STKM13A · C2700 · A6063-



薄肉研磨ステンレスパイプ/薄肉研磨ステンレスパイプ

₩材質


Type

SPLS:t=0.3・0.5・1.0選択





CADデータフォルダ名:36 Rods

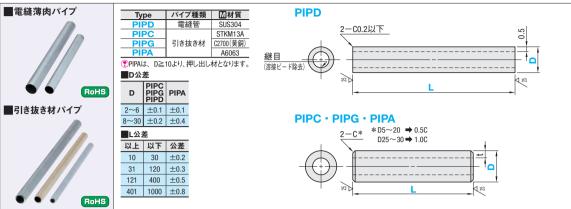


・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・									
			1	1		·U会び Y基準		リ 法は 祝僧衣で	と推設へたさい。
		L 指定1mm単位	t						
Туре	D	指足1mm年世		L10~100	L101~200	L201~400	L401~600	L601~800	L801~1000
	2			280	320	430	590	730	870
	3			280	320	430	590	730	870
	4			320	360	560	740	920	1,120
	5			390	450	630	810	1,010	1,150
	6			450	520	700	900	1,040	1,190
	8			590	670	920	1,190	1,370	1,570
PIPD (SUS304)	10	10~1000	0.5	640	740	1,010	1,260	1,460	1,640
	12			740	810	1,060	1,340	1,480	1,720
	15			810	900	1,150	1,410	1,570	1,790
	16			810	900	1,150	1,410	1,570	1,790
	20			850	980	1,200	1,430	1,650	1,880
	25			870	1,190	1,290	1,550	1,710	1,930
	30			1,160	1,220	1,330	1,690	1,830	2,070
	5	10~250	4	270	350	460			
	6		1	270	350	460	590	-	910 1,080 980 1,180 1,010 1,200
	8	10~500		280	380	530	700		
PIPC (STKM13A)	10			290	390	560	730		
	12	10~900	11	290	390	560	730		
	13		1.5	310	410	600	800		
	15		1.5	310	420	620	810		
	16		1	320	460	700	940	1,180	
	20		1	350	490	760	1,020	1,300	1,580
	25	10~1000	2	380	560	910	1,260	1,600	
	30		2	450	700	1,180	1,650	2,140	2,620
	5	10~250	_	280	440	750	_		
	6	10~500	1	280	440	750	1,050	_	_
	8			290	460	790	1,110	-	
	10			330	540	950	1,350		
PIPG (C2700)	12		1	420	730	1,310	1,900	2,490	
(02.00)	13	10~900	1.5	460	810	1,480	2,150	2,820	
	15		1.5	480	830	1,520	2,210	2,900	
	20		1	560	990	1,840	2,700	3,550	
	25	10~1000	2	580	1,030	1,920	2,820	3,710	
	30		2	650	1,170	2,210	3,250	4,280	5,320
	5	10~250	4	290	410	570			
	6		1	290	410	570	760	-	_
	8	10~500		310	410	600	800	_	
	10			310	420	620	810		
(10000)	12		1	310	420	620	810	1,020	1,220
PIPA (A6063)	13	10~900	1.5	320	450	670	900	1,120	1,340
	15		1.5	340	460	710	950	1,200	1,460
	16		2	340	480	710	970	1,220	1,470
	20		1	350	520	810	1,110	1,400	1,690
	25	10~1000	2	390	600	970	1,340	1,720	2,100




	ライド価格 PIPC・F		満切り捨て)	P.127					
数量区分	標準対応 個別対応								
数里区ガ		小			大口				
数量	1~9	10~19	20~49	50~100	101~				
値引率	基準単価	30%	40%	45%	お見積り				
出荷日		通常							

・表示数量超えはWOSにてご確認ください。



PIPG			\checkmark				
数量区分		個別対応					
数里区ガ		大口					
数量	1~19	20~34	35~49	50~100	101~		
値引率	基準単価	5%	10%	18%	お見積り		
出荷日		の兄領リ					
●表示数量超えはWOSにてご確認ください。							

-内外径精密タイプ-: 新価格



SPLS SUS304 SPLT:t=0.5のみ		√(∜	
	■L寸公	美	
SPLT SUS304(焼鈍材)	以上	以下	公差
2-C0.2以下	10	30	±0.2
6	31	120	±0.3
15	121	400	±0.5
	401	1000	±0.8
	D寸公		
溶接ビード除去	以上	以下	公差
	2	12	-0.05
			0.03
RoHS	15	30	-0.1
型式 ¥基準単価			
D #EEE MAT.		_	

				¥基準単価							
Туре	t=0.5	D t=0.3	t=1.0	指定1mm単位	L10~50	L51~100	L101~200	L201~400	L401~600	L601~800	L801~1000
	2	2A			320	340	360	490	670	830	1,000
	3	3A			320	340	360	490	670	830	1,000
	4	4A	4B		360	390	440	580	790	990	1,130
	5	5A	5B		450	470	520	670	870	1,060	1,210
SPLS	6	6A	6B		520	540	600	740	930	1,100	1,260
SPLS	8	8A	8 B		670	700	790	990	1,260	1,440	1,630
SPLT	10		10B	10~1000	750	790	870	1,060	1,340	1,530	1,730
SPLI	12				820	870	960	1,140	1,400	1,570	1,810
	15				890	930	1,050	1,210	1,490	1,630	1,880
	16	-	_		990	1,050	1,170	1,280	1,570	1,670	1,970
	20				1,050	1,100	1,220	1,360	1,630	1,730	2,040
	25				1,150	1,210	1,350	1,510	1,820	1,890	2,250
(SPLTはt=0.5のみです。)	30				1,270	1,340	1,490	1,630	1,930	1,970	2,470



SPLN





Examp 使用例 Example

> 配管用パイプ 注入用ノズル 化粧管 にご利用頂けます。 SPLTは曲げてご利用頂ける

よう焼鈍材(180~220HV)を


使用しております。

・樹脂ロッド

【製品用途】

アンテナ

複写機用ロールシャフト

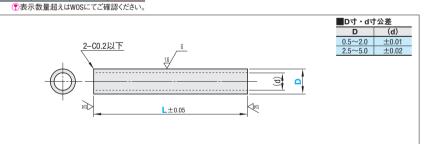

型式		L	(d)	¥	基準単位	5		Order
Туре	D	指定1mm単位	(u)	L10~50	L51~100	L101~200		注文例
	0.5		0.34	990	1,060	1,230		
	1		0.7	820	890	1,020		Delive
	1.5		1.1	750	830	950		出荷日
	2		1.6	670	740	830	ت	
SPLN	2.5	10~200	2.1	670	740	830		
SPLN	3	10/~200	2.6	670	740	830		
	3.5		3.1	670	740	830		
	4		3.6	710	800	910		Price 価格
	4.5		4.1	710	800	910		шин
	5		4.6	820	910	1,010		








		, 0	200	эш19	2001	1/ 1	4	I IVI (0.002
? 3本	以上	で1明	細行	当	たり-	-律	54	0円	
数数数数数数数数数数数数数数数数数数数数数数数数数数数数数数数数数数数数数数数	量スラ	イド個	格	(1	円未	満切]1)‡	舎て)	P.12

■ 数重スフイト価格 (♥1円未満切り捨() P.127							
数量区分		個別対応					
数里区ガ		大口					
数量	1~9	10~19	20~49	50~100	101~		
値引率	基準単価	お見積り					

・表示数量超えはWOSにてご確認ください。

ご注文締切



■内外径精密タイプ

■材質 SUS304