



GAS SPRINGS

# ガススプリング

—取付方向限定タイプ—

規格追加  
赤文字表示

● 使用温度: -20~60°C

## ■ガススプリング

型式 Type	No.	最大長 Lmax	最小長 Lmin	ストローク	ガス反力(20°C)		適合取付 プラケット	重量 (g)	¥基準単価
					Lmax-10mmストローク時 N kgf	Lmax-(S)mmストローク時 (S) kgf			
GSS	15050A				27	2.8	32	3.4	
	15050B				85	8.7	102	10.4	
	15050C	181.0	131.0	50.0	147	15.0	175	17.9	40
	15050D				186	19.0	222	22.7	
	15050E				206	21.0	245	25.0	
	15070A				81	8.3	102	10.4	60
	15070B	221.0	151.0	70.0	119	12.1	124	12.7	41.5
	15070C				196	20.0	245	25.0	60
	15090A				69	7.0	89	9.1	
	15090B				79	8.1	103	10.5	
	15090C	261.0	171.0	90.0	88	9.0	115	11.7	
	15090D				147	15.0	191	19.5	
	15090E				196	20.0	254	25.9	
	15100A				76	7.8	103	10.5	
	15100K	281.0	181.0	100.0	110	11.2	147	15.0	
	15100B				196	20.0	257	26.2	
	18090A	261.0	171.0	90.0	263	26.8	343	35.0	80
	18100A	281.0	181.0	100.0	324	33.1	428	43.7	90
	22080K				116	11.8	142	14.5	
	22080A	279.0	199.0	80.0	196	20.0	237	24.2	70
	22080B				246	25.1	299	30.5	
	22096A	306.0	210.0	96.0	392	40.0	494	50.4	86
	22142A	472.0	330.0	142.0	279	28.5	372	38.0	125
	22147A	412.0	265.0	147.0	147	15.0	194	19.8	
	22147B				240	24.5	314	32.0	130
	22150A	464.0	314.0	150.0	343	35.0	408	41.6	140
	22210A	567.0	356.5	210.5	587	59.9	799	81.5	
	22210B				667	68.1	908	92.7	179
	22235A				129	13.2	195	19.9	206
	22235B	580.0	344.5	235.5	248	25.3	314	32.0	208
	22235C				343	35.0	435	44.4	
	22235D				507	51.7	642	65.5	206
	22243A	627.0	384.0	243.0	196	20.0	301	30.7	
	22243B				433	44.2	657	67.0	215
	22253A	675.0	421.5	253.5	311	31.7	367	37.4	197
	22270K				127	13.0	190	19.4	
	22270A				343	35.0	497	50.7	
	22270L	670.0	400.0	270.0	507	51.7	739	75.4	
	22270B				596	60.8	868	88.6	
	22270C				755	77.0	1104	112.7	
	22270D				596	60.8	966	98.6	290
	22300K	700.0	400.0	300.0	596	60.8	966	98.6	
	22300A				745	76.0	1160	118.4	275
	22300B				850	86.7	1320	134.7	
	22315A	795.0	480.0	315.0	833	85.0	1220	124.5	305
	22356A	833.0	476.5	356.5	216	22.0	288	29.4	
	22356B				345	35.2	460	46.9	350

Order  
注文例型式  
GSS15050BDelivery  
出荷日  
3 日目出荷¥  
価格■数量スライド価格 (1円未満切り捨て) P127  
標準対応 小口 大口  
数量区分  
数量 基準単価 5% 10% 18% お見積り  
値引率 5% 10% 18% お見積り  
※表示数量超えはWOSにてご確認ください。

● CADデータフォルダ名: 37\_Springs

GAS SPRINGS -GAS REACTION FORCE SPECIFIED TYPE-/ GAS SPRINGS -STAINLESS STEEL-

ガススプリング/ステンレスガススプリング

—ガス反力指定タイプ—

価格改訂

納期短縮


□: 新価格

● CADデータフォルダ名: 37\_Springs



● 使用温度: -20~60°C

## ■ガススプリング

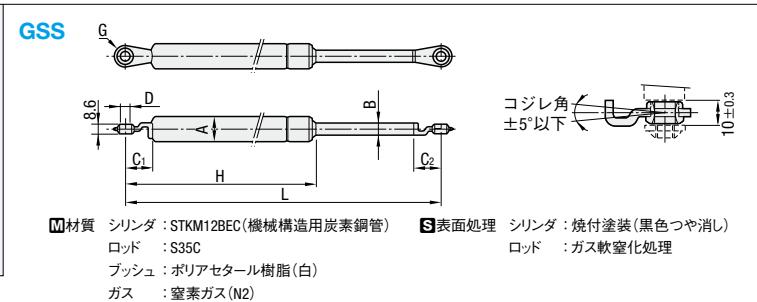

型式 Type	No.	最大長 Lmax	最小長 Lmin	ストローク	ガス反力(20°C)		適合取付 プラケット	重量 (g)	¥基準単価
					Lmax-10mmストローク時 N kgf	Lmax-(S)mmストローク時 (S) kgf			
GSS	15050A				27	2.8	32	3.4	
	15050B				85	8.7	102	10.4	
	15050C	181.0	131.0	50.0	147	15.0	175	17.9	40
	15050D				186	19.0	222	22.7	
	15050E				206	21.0	245	25.0	
	15070A				81	8.3	102	10.4	60
	15070B	221.0	151.0	70.0	119	12.1	124	12.7	41.5
	15070C				196	20.0	245	25.0	60
	15090A				69	7.0	89	9.1	
	15090B				79	8.1	103	10.5	
	15090C	261.0	171.0	90.0	88	9.0	115	11.7	
	15090D				147	15.0	191	19.5	
	15090E				196	20.0	254	25.9	
	15100A				76	7.8	103	10.5	
	15100K	281.0	181.0	100.0	110	11.2	147	15.0	
	15100B				196	20.0	257	26.2	
	18090A	261.0	171.0	90.0	263	26.8	343	35.0	80
	18100A	281.0	181.0	100.0	324	33.1	428	43.7	90
	22080K				116	11.8	142	14.5	
	22080A	279.0	199.0	80.0	196	20.0	237	24.2	70
	22080B				246	25.1	299	30.5	
	22096A	306.0	210.0	96.0	392	40.0	494	50.4	86
	22142A	472.0	330.0	142.0	279	28.5	372	38.0	125
	22147A	412.0	265.0	147.0	147	15.0	194	19.8	
	22147B				240	24.5	314	32.0	130
	22150A	464.0	314.0	150.0	343	35.0	408	41.6	140
	22210A	567.0	356.5	210.5	587	59.9	799	81.5	
	22210B				667	68.1	908	92.7	179
	22235A				129	13.2	195	19.9	206
	22235B	580.0	344.5	235.5	248	25.3	314	32.0	208
	22235C				343	35.0	435	44.4	
	22235D				507	51.7	642	65.5	206
	22243A	627.0	384.0	243.0	196	20.0	301	30.7	
	22243B				433	44.2	657	67.0	215
	22253A	675.0	421.5	253.5	311	31.7	367	37.4	197
	22270K				127	13.0	190	19.4	
	22270A				343	35.0	497	50.7	
	22270L	670.0	400.0	270.0					