


CLEAN BEARINGS WITH HOUSINGS -SINGLE BEARING TYPE-
低発塵グリース封入ベアリングホルダセット
-シングルタイプ-


2日目納短縮



カタログ規格外品はこちら [P.137](#)
CADデータフォルダ名: 14_Bearings_with_Holder

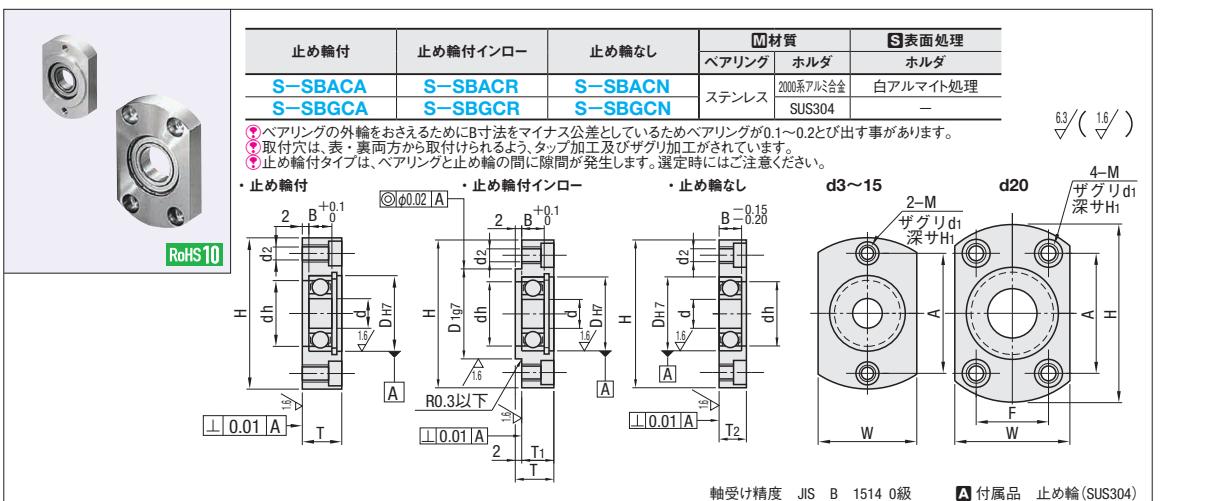

Type	ベアリング品番	d	D _{H7}	許容差	B	H	W	T	T ₁	T ₂	dh	D _{1g7}	許容差	A	F	M(並目) (d ₂)	d ₁	H ₁
止め輪付 S-SBACA S-SBGCA	623ZZ	3	10	+0.015 0	4	33	16	9	7	6	7	14	-0.006	24		M4 (3.3)	6.5	3.4
	624ZZ	4	13	+0.018 0	5	35	18	10	8	7	9	17	-0.024	26				
	605ZZ	5	14	+0.018 0	5	36	20	10	8	7	10	18	-0.024	26				
	625ZZ	5	16	+0.018 0	5	38	22	10	8	7	12	20	-0.024	28				
	606ZZ	6	17	+0.018 0	6	39	23	11	9	8	13	21	-0.007	29				
止め輪付インロー S-SBACR S-SBGCR	608ZZ	8	22	+0.021 0	7	45	29	12	10	9	18	27	-0.028	35				
	6900ZZ	10	22	+0.021 0	6	45	29	11	9	8	19	27	-0.009	40				
	6000ZZ	10	26	+0.021 0	8	50	34	13	11	10	22	32	-0.034	44				
	6200ZZ	10	30	+0.021 0	9	54	38	14	12	11	24	36	-0.034	44				
止め輪なし S-SBACN S-SBGCN	6901ZZ	12	24	+0.025 0	6	48	31	11	9	8	21	30	-0.028	38				
	6001ZZ	12	28	+0.025 0	8	52	36	13	11	10	24	34	-0.028	42				
	6201ZZ	12	32	+0.025 0	10	56	40	15	13	12	26	38	-0.028	46				
	6902ZZ	12	32	+0.021 0	7	57	37	12	10	9	25	35	-0.009	45				
	6002ZZ	15	32	+0.025 0	9	60	40	14	12	11	28	38	-0.034	48				
	6202ZZ	15	35	+0.025 0	11	64	44	17	15	13	29	42	-0.028	52				
	6904ZZ	15	37	+0.025 0	9	69	47	15	13	11	34	45	-0.028	51	24	M8 (6.8)	11	6.5
	6004ZZ	20	42	+0.025 0	12	77	54	18	16	14	36	50	-0.010	56	32			
	6204ZZ	20	47	+0.025 0	14	81	58	20	18	16	40	54	-0.040	59	34			

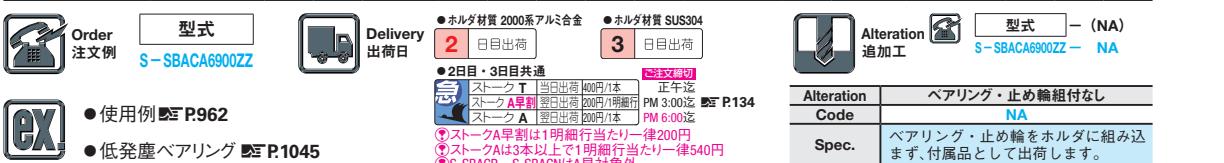


CLEAN BEARINGS WITH HOUSINGS -DOUBLE BEARING TYPE-

低発塵グリース封入ベアリングホルダセット
-ダブルタイプ-

2日目納短縮



カタログ規格外品はこちら [P.137](#)
CADデータフォルダ名: 14_Bearings_with_Holder

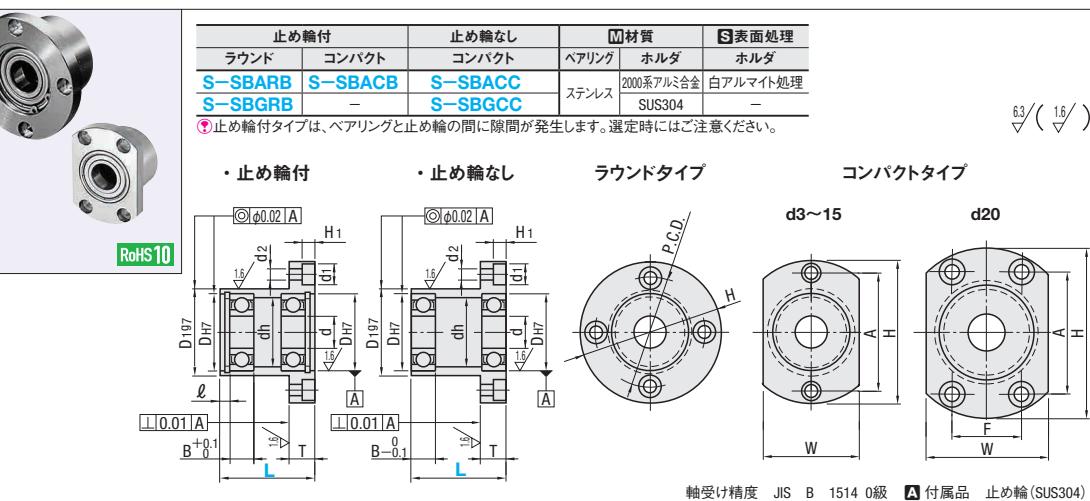

Type	ベアリング品番	L 選択	d	D _{H7}	許容差	B	l	H	W	T	dh	D _{1g7}	許容差	P.C.D.	A	F	d ₁	d ₂	H ₁	
止め輪付 (ラウンドタイプ) S-SBARB S-SBGRB	623ZZ	20 30	3	10	+0.015 0	4	2.65	33	16	7	7	14	-0.006	24	24			6.5	3.5	3.1
	624ZZ	20 30	4	13	+0.018 0	5	2.65	35	18	9	17	-0.024	-0.006	26	26					
	605ZZ	20 30	5	14	+0.018 0	5	2.65	36	20	10	18	-0.024	-0.024	26	26					
	625ZZ	25 30	5	16	+0.018 0	5	2.65	38	22	12	20	-0.024	-0.024	28	28					
	606ZZ	20 35	6	17	+0.018 0	6	2.65	39	23	13	21	-0.024	-0.007	29	29					
(コンパクトタイプ) S-SBACB	608ZZ	25 35	8	22	+0.021 0	7	2.65	45	29	18	27	-0.028	-0.028	35	35					
	6900ZZ	25 40	10	26	+0.021 0	8	2.85	50	34	22	32	-0.009	-0.009	40	40			8	4.5	4.1
	6000ZZ	25 40	10	30	+0.021 0	9	2.85	54	38	24	36	-0.034	-0.034	44	44					
	6200ZZ	30 40	12	28	+0.021 0	10	2.85	56	40	24	34	-0.028	-0.028	42	42					
止め輪なし (コンパクトタイプ) S-SBACC S-SBGCC	6901ZZ	25 40	12	28	+0.021 0	11	3.75	64	44	25	35	-0.028	-0.028	38	38					
	6201ZZ	30 40	12	32	+0.025 0	12	3.75	67	54	28	38	-0.034	-0.034	48	48			9.5	5.5	5.1
	6902ZZ	25 50	15	32	+0.025 0	11	3.75	64	44	29	42	-0.028	-0.028	52	52					
	6002ZZ	30 50	15	35	+0.025 0	11	3.75	69	47	34	45	-0.034	-0.034	56	51	24				
	6202ZZ	35 50	20	42	+0.025 0	12	3.95	77	54	11	36	-0.034	-0.034	64	56	32	11	6.6	6.1	
	6904ZZ	40 50	20	47	+0.025 0	14	3.95	81	58	40	54	-0.034	-0.034	68	59	34				
	6204ZZ	45 50	20	47	+0.025 0	14	3.95	81	58	40	54	-0.034	-0.034	68	59	34				

