

LINKS
リンク
—スタンダードタイプ—




■特長：2穴タイプの標準仕様で、選択タイプとフリータイプがございます。

RoHS10


L寸選択タイプ	D2寸フリータイプ	W寸フリータイプ	Rタイプ	材質	表面処理
LNSB	LNDB	LNFB	LNFRB	S45C相当*	四三酸化鉄皮膜
—	LNDM	LNFM	LNFRM	—	無電解ニッケルメッキ
LNSS	LNDS	LNFS	LNFRS	SUS304	—

*T=2は一般構造用鋼


L寸選択タイプ

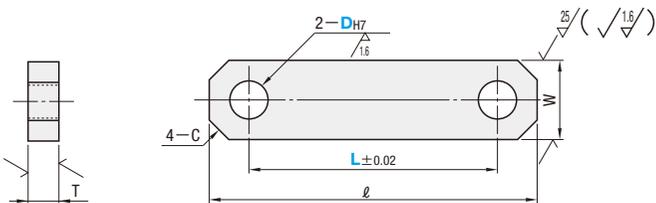


D2寸フリータイプ

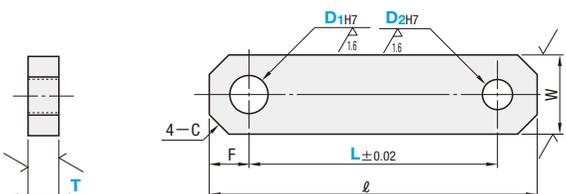

W寸フリータイプ

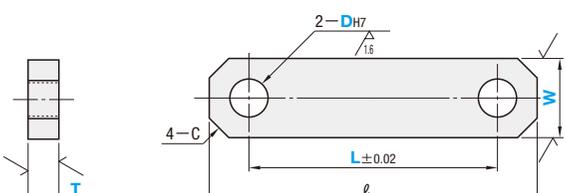

Rタイプ

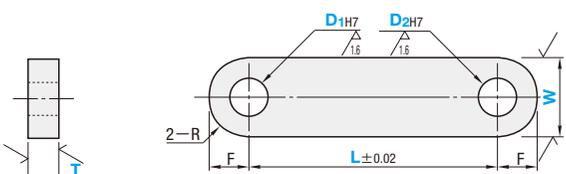

●T寸の寸法公差

T	2	3~16	19~22
	±0.15	0	0
		-0.3	-0.33

■L寸選択タイプ

型式 Type	DH7	L 選択						W	T	ℓ	C	¥基準単価		
		25	30	40	50	75	90					LNSB	LNSS	
LNSB LNSS	5	25	30	40	50	75	90	13	5	L+13	3	980	1,200	
	6	25	30	35	40	45	50					75	1,040	1,260
	8	25	30	35	40	45	50					75	1,080	1,290
	10	30	30	40	50	75	90					1,140	1,360	
	12			50	75									

■D2寸フリータイプ

型式 Type	DH7	D2H7 指定1mm単位	L 指定1mm単位	T 選択	W	ℓ	F	C
3	5~150	5 6	13	L+10	5			
4	6~150	5 6 9		16	L+12	6	3	
5	7~150	5 6 9	19		L+16	8		
6	8~150	5 6 9		25	L+18	9		
8	10~150	5 6 9	32		L+20	10	5	
10	12~200	5 6 9		38	L+24	12		
12	14~200	5 6 9 12	50		L+28	14	8	
13	15~200	5 6 9 12		L+30	15			
14	16~200	5 6 9 12	25	L+36	18			
15	18~200	5 6 9 12		32				
16	20~200	5 6 9 12 16	38					
18	22~200	9 12 16		50				
20	25~300	9 12 16 19						
25	30~300	9 12 16 19						

●D2H7=2の時、T≧9となります。

◎カタログ規格外品はこちら P.137
◎CADデータフォルダ名：56_Connecting_Parts

■W寸フリータイプ

型式 Type	DH7	L 指定1mm単位	W 指定1mm単位	T 選択						ℓ	C	
				2	3	5	6	9	10			
LNFB LNFM LNFS	2	10~75	7~12	2	3					L+8	2	
	3			5	6							
	4			5	6	9						
	5	10~150	10~20	5	6	9				L+10	3	
	6			5	6	9						
	8			5	6	9	10					
	10			5	6	9	10					
	12			5	6	9	10	12	16			
	13	20~200	20~30	5	6	9	10	12	16	L+12	5	
	14			9	10	12	16					
15	9			10	12	16						
16	9			10	12	16						
18	20~40	20~30	9	10	12	16			L+16	5		
20			9	10	12	16						
25			9	10	12	16						
20	30~300	25~50	9	10	12	16	19		L+20	8		
25			9	10	12	16	19	22				

■Rタイプ

型式 Type	DH7	D2H7 指定1mm単位	L 指定1mm単位	W 指定1mm単位	T 選択						F	R
					2	3	5	6	9	10		
LNFRB LNFRM LNFRS	2	2~20	20~75	6~12	2	3					W/2	W/2
	3				7~20	5	6					
	4				8~20	5	6	9				
	5				9~20	5	6	9				
	6				10~20	5	6	9				
	8	30~200	16~30	5	6	9	10			W/2	W/2	
	10			16~30	5	6	9	10				
	12			18~30	9	10	12	16				
	13			19~30	9	10	12	16				
	14			20~40	9	10	12	16				
	15	40~300	21~40	9	10	12	16		W/2	W/2		
	16			22~40	9	10	12	16				
	18			24~40	9	10	12	16				
	20			30~50	9	10	12	16			19	
	25			35~60	9	10	12	16			19	22

●D2H7=2の時、T≧10となります。



Order 注文例
型式 - D2 - L - W - T
LNSB5 - 8 - L25 - T6
LNDB10 - 8 - L100 - W20 - T9
LNFB10 - 6 - L60 - W15 - T9
LNFRB8 - 6 - L100 - W15 - T9



Price 数量スライド価格 (●円未満切り捨て) P.133
数量区分 標準対応 個別対応
1~9 10~14 15~19 20~25 26~
値引率 基準単価 5% 10% 18% お見積り



Delivery 在庫品 翌日出荷 P.133
●ご希望によりPM6:00迄、当日出荷受付致します。
●D2寸フリータイプ・W寸フリータイプ・Rタイプ
3 日日出荷
●注文確定
●在庫 A 翌日出荷 200円/1本 PM 6:00迄 P.134
●3本以上で1明細行当たり一律540円

DH7	¥基準単価											
	LNDB		LNDM		LNDS		LNFRB		LNFRM		LNFRS	
	最短L~100	L101~最長L										
2	1,200	1,620	1,240	1,700	1,460	1,980	1,420	1,830	1,460	1,910	1,680	2,200
3	—	—	—	—	—	—	—	—	—	—	—	—
4	1,280	1,700	1,330	1,770	1,550	2,060	1,500	1,910	1,550	1,990	1,770	2,280
5	—	—	—	—	—	—	—	—	—	—	—	—
6	1,340	1,790	1,400	1,870	1,630	2,170	1,560	2,000	1,610	2,080	1,850	2,380
8	—	—	—	—	—	—	—	—	—	—	—	—
10	1,390	1,960	1,460	2,060	1,670	2,350	1,610	2,170	1,680	2,280	1,890	2,570
12	—	—	—	—	—	—	—	—	—	—	—	—
13	1,470	2,050	1,550	2,140	1,750	2,440	1,690	2,270	1,770	2,360	1,970	2,660
14	—	—	—	—	—	—	—	—	—	—	—	—
15	1,600	2,240	1,690	2,340	1,910	2,660	1,820	2,460	1,910	2,550	2,130	2,880
16	—	—	—	—	—	—	—	—	—	—	—	—
18	1,770	2,460	1,860	2,570	2,100	2,930	1,980	2,680	2,080	2,790	2,320	3,150
20	1,870	2,710	1,980	2,880	2,340	3,410	2,060	2,750	2,150	2,860	2,390	3,220
25	1,980	3,000	2,100	3,050	2,480	3,630	2,160	3,000	2,270	3,170	2,630	3,700
25	—	—	—	—	—	—	—	—	—	—	—	—
25	1,980	3,000	2,100	3,050	2,480	3,630	2,270	3,290	2,390	3,340	2,770	3,920



Alteration 追加加工
型式 - D2 - L(LC) - W - T
LNFB10 - LC100.5 - W20 - T9

DH7	¥基準単価					
	LNFB		LNFM		LNFS	
	最短L~100	L101~最長L	最短L~100	L101~最長L	最短L~100	L101~最長L
2	1,320	1,780	1,370	1,870	1,610	2,190
3	—	—	—	—	—	—
4	1,400	1,870	1,470	1,950	1,710	2,270
5	—	—	—	—	—	—
6	1,480	1,970	1,540	2,050	1,800	2,390
8	—	—	—	—	—	—
10	1,540	2,160	1,610	2,270	1,840	2,590
12	—	—	—	—	—	—
13	1,620	2,260	1,710	2,360	1,930	2,690
14	—	—	—	—	—	—
15	1,780	2,490	1,880	2,600	2,120	2,960
16	—	—	—	—	—	—
18	1,960	2,730	2,070	2,860	2,330	3,260
20	2,080	3,010	2,200	3,200	2,600	3,800
25	2,200	3,340	2,340	3,390	2,750	4,030

Alteration	Code	Spec.	¥/1Code
	LC	L寸法0.1mm単位指定 LをLCに変更して指定 指定方法 LC100.5 ●L寸選択タイプ適用不可	200

56
連結部品
リンク
機構部品