




● CADデータフォルダ名: 34_Screws

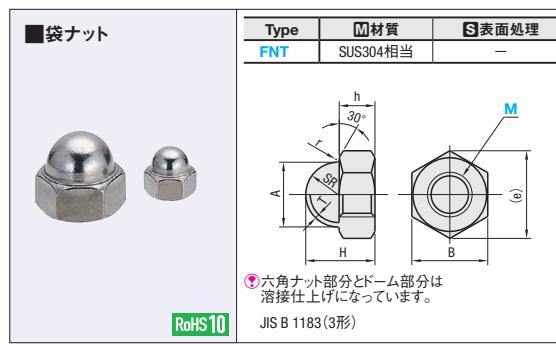

型式 Type M (並目)	H	h	B	A (min.)	T (min.)	(e) (約)	r (約)	¥基準単価 1~5コ 6~9コ 10~29コ 30~500コ	¥スライド単価 32 40 36 32
FNT 3	5.0	2.4	5.5	4.6	0.3	6.1	0.5	40	38
4	6.2	3.2	7	5.6		8.1			
5	7.5	4	8	6.6	0.6	9.2			
6	9.5	5	10	8.5		11.5	0.5	50	47
8	12.5	6.5	13	11.5	0.8	15		60	57
10	15.5	8	17	14.5	1.0	19.6		100	95
12	18.5	10	19	16.5	1.2	21.9		140	133
16	24	13	24	21.5	1.6	27.7	1.0	300	285
20	29	16	30	26.5	1.6	34.6		450	427
24	35.5	19	36	32.5	2.0	41.6		900	855

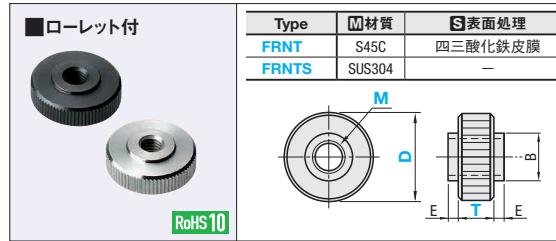

型式 Type M (並目)	D	T	E	B	FRNT	FRNTS
FRNT 3	12	3	5	0.5	6	220
4	16	4	6	0.5	8	230
5	20	5	8	0.5	10	260
6	24	6	8	1	12	310
8	30	8	10	1	16	360
10	36	10	12	1	20	470

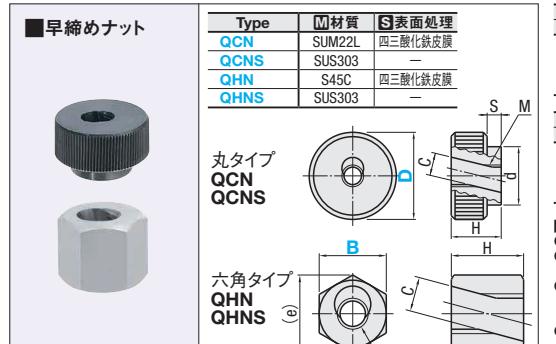

型式 Type M (並目)	D	M	H	S	d	C	参考締付トルク N·kgf/m	¥基準単価 QCN QHNS
QCNS 24	6	14	4	16	6.7	19.6	4.8(0.5)	1,200 1,340
QCNS 30	8	17	5	20	8.7	9.0(0.9)	1,580 1,770	
QCNS 36	10	20	6	28	11.0	17.5(1.8)	1,990 2,260	
QCNS 40	12	24	8	32	13.7	17.5(1.8)	2,370 2,770	

型式 Type M (並目)	B	H	C	(e)	参考締付トルク N·kgf/m	¥基準単価 QHN QHNS
QHN 17	6	14	6.7	19.6	4.9(0.5)	720 880
QHN 19	8	17	8.7	21.9	9.8(1.0)	1,000 1,280
QHN 24	10	20	11.0	27.7	15.6(1.6)	1,250 1,700
QHN 27	12	24	13.7	31.2	19.6(2.0)	1,550 2,100

■特長と使用上の注意
●長いねじでもスピーディに締めつけできます。
●参考締付トルク以下で使用し、強力な締付は避けてください。
●スレット穴にねじを通して、締めつけ位置まで移動させます。ついで、ノブをねじに垂直に引き起こし、締めつけください。
●ねじの締めつけ長さ(*)がH寸法より短い場合には充分な締めつけ力が得られません。ねじの締めつけ長さ(*)はH寸法以上になるように設計してください。
●通常のねじ山に比べ、若干浅く製作されています。





型式 Type M (並目)	D	M	B	b	b1	C	¥基準単価 RNSB - RNSM RNLB - RNL
RNSB 4	8.5	5	10	4	3	8	250 260
RNSM 5	10	7	13	5	4	10	290 300
RNLB 6	13	9	16	6	5	12	340 350
RNLB 8	16	12	22	8	6.5	16.5	410 420
RNLB 10	18	14	26	10	8	20	480 510

型式 Type M (並目)	D	M	B	b	b1	C	¥基準単価 RNSB - RNSM RNLB - RNL
NTS8	4	4.8	8	6.5	4	2.5	4.5 280 270
NTS8	5	5.8	10	8	5	3	5.5 290 280
NTS8	6	7.7	13	9.5	6	3.5	7 290 280
NTS8	7	9.7	13	10.5	6	4.5	9 310 290
NTS8	8	11.7	16	12.5	7	5.5	11 380 350
NTS8	10	17.6	25	18.5	10	8.5	14 490 470
NTS8	12	21.6	32	24.5	14	10.5	18 690 660
NTS8	16	24.6	35	30.5	20	10.5	22 880 840



型式 Type M (並目)	D	M	B	b	b1	C	¥基準単価 RNSB - RNSM RNLB - RNL
-------------------	---	---	---	---	----	---	---------------------------------

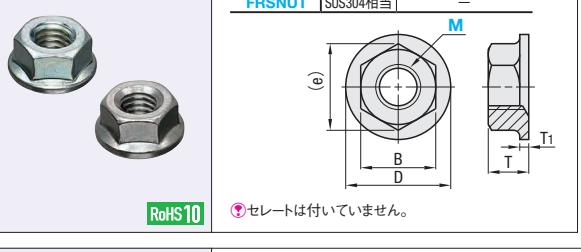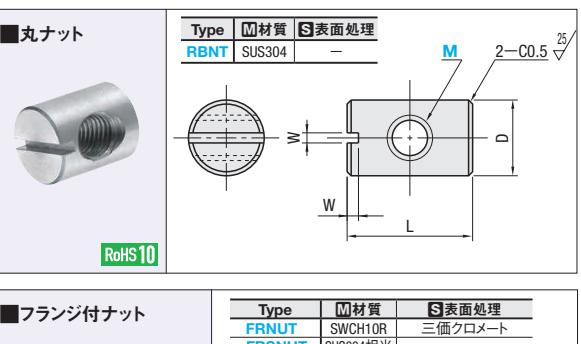

型式 Type M (並目)	D	L	W	¥基準単価
FRNUT 3	6	8	1	155 40 175 50
FRNUT 4	8	10	1	160 45 180 55
FRNUT 5	10	12	1	165 50 185 60
FRNUT 6	12	14	1	170 55 190 65
FRNUT 8	14	16	1	175 65 200 75
FRNUT 10	18	20	1	180 70 220 90



型式 Type M (並目)	M×Pitch 並目	M×Pitch 細目	D	T	d	b	¥基準単価 CRNT SCRNT SCRNT SCRNTS
CRNT 10	10×1.5	10×1.0	25	8	4.6	5	4 4 980 1,070 1,500 1,660
CRNT 12	12×1.75	12×1.0	30	10	5.8	6	5 5 1,070 1,190 1,940 2,160
CRNT 16	16×2	16×1.5	38	12	6.9	7	6 6 1,190 1,330 2,250 2,500
CRNT 20	20×2.5	—	45	16	9.2	8	8 1,370 — — —
CRNT 24	24×3	—	50	18	9.2	9	8 1,570 — — —
CRNT 30	30×3.5	—	60	20			