

新商品


GAS SPRINGS -FREE ATTACHING DIRECTION TYPE-

# ガススプリング

—取付方向自在 / 高ガス反力・樹脂ブッシュ付属タイプ—

CADデータフォルダ名: 37\_Springs

■特長: ガス反力が高い為シリンダ径を小さくして選定することが可能です。

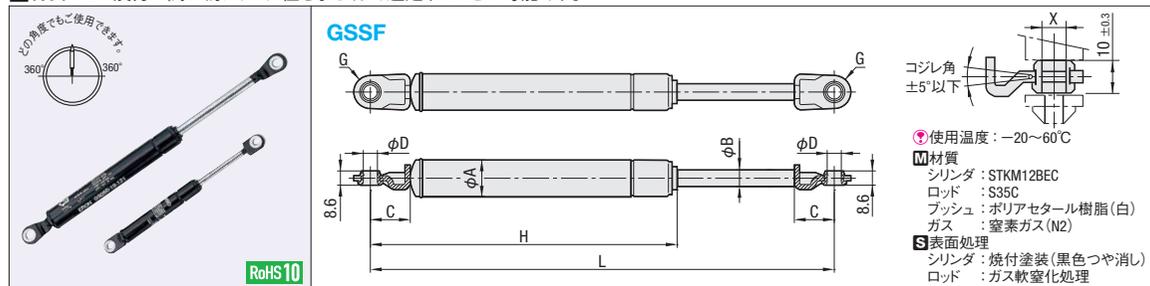

Type	型式 No.	最大長 Lmax	最小長 Lmin	ストローク	ガス反力(20°C)					A	B	C	D	G	H	適合取付 ブラケット	重量 (g)	¥基準単価
					Lmax-10mm ストローク時		Lmax-(S)mm ストローク時											
					N	kgf	N	kgf	(S)									
GSSF	15050-070	225.0	175.0	50.0	69	7.0	85	8.7	40	15	6	15	6.5	R8	152	GSSB6A	104	1,720
	15050-100				98	10.0	121	12.3										
	15050-150				147	15.0	180	18.4										
	15050-200				196	20.0	240	24.5										
	15070-050	280.0	210.0	70.0	49	5.0	70	7.2	60	24	6	15	6.5	R9	178.5	GSSB6A	110	1,750
	15070-100				98	10.0	138	14.4										
	15070-150				147	15.0	207	21.5										
	15075-070				69	7.0	101	10.3										
	15075-100	275.0	200.0	75.0	98	10.0	142	14.5	65	15	6	15	6.5	R8	178	GSSB6A	121	1,820
	15075-150				147	15.0	214	21.8										
	15075-200				196	20.0	284	29.0										
	15100-070				69	7.0	95	9.7										
	15100-100	350.0	250.0	100.0	98	10.0	135	13.8	90	15	6	15	6.5	R8	226	GSSB6A	147	1,860
	15100-150				147	15.0	202	20.6										
	15100-200				196	20.0	269	27.4										
	15110-050				49	5.0	77	7.9										
	15110-100	370.0	260.0	110.0	98	10.0	153	15.6	100	15	6	15	6.5	R9	227.5	GSSB6A	150	1,940
	15110-150				147	15.0	228	23.3										
	15160-050				49	5.0	80	8.2										
	15160-100				98	10.0	159	16.2										
	15160-150	480.0	320.0	160.0	147	15.0	238	24.3	150	15	6	15	6.5	R9	288.5	GSSB6A	180	2,060
	18050-250				245	25.0	326	33.3										
	18050-300				294	30.0	390	39.8										
	18050-350				343	35.0	455	46.4										
18100-250	350.0	250.0	100.0	245	25.0	384	39.2	90	18	8	15	6.5	R9	218.5	GSSB8A	203	2,830	
18100-300				294	30.0	460	46.9											
18100-350				343	35.0	536	54.7											
18110-200				196	20.0	291	29.7											
18110-250	380.0	270.0	110.0	245	25.0	364	37.1	100	18	8	15	6.5	R9	238.5	GSSB8A	210	1,990	
18110-300				294	30.0	435	44.4											
18125-250				245	25.0	355	36.2											
18125-300				294	30.0	426	43.5											
18125-350	425.0	300.0	125.0	343	35.0	495	50.5	115	18	8	15	6.5	R9	268.5	GSSB8A	238	2,830	
18150-250				245	25.0	382	39.0											
18150-300				294	30.0	458	46.7											
18150-350				343	35.0	534	54.5											
18160-200	490.0	330.0	160.0	196	19.6	312	31.8	150	18	8	15	6.5	R10	299	GSSB8A	260	2,100	
18160-250				245	25.0	389	39.7											
18160-300				294	30.0	467	47.7											
18210-200				196	20.0	314	32.0											
18210-250	610.0	400.0	210.0	245	25.0	392	40.0	200	18	8	15	6.5	R10	369.5	GSSB8A	320	2,210	
18210-300				294	30.0	470	48.0											
22100-400				392	40.0	531	54.2											
22100-450				441	45.0	597	60.9											
22100-500	375.0	275.0	100.0	490	50.0	663	67.7	90	22	10	15	6.5	R10	244	GSSB8A	292	1,920	
22100-550				539	55.0	729	74.4											
22110-350				343	35.0	526	53.7											
22110-400				392	40.0	600	61.2											
22110-450	380.0	270.0	110.0	441	45.0	675	68.9	100	22	10	15	6.5	R10	238.5	GSSB8A	300	1,970	
22110-500				490	50.0	749	76.4											
22125-400				392	40.0	577	58.9											
22125-450				441	45.0	648	66.1											
22125-500	425.0	300.0	125.0	490	50.0	721	73.6	115	22	10	15	6.5	R10	268.5	GSSB8A	327	2,030	
22125-550				539	55.0	792	80.8											

Type	型式 No.	最大長 Lmax	最小長 Lmin	ストローク	ガス反力(20°C)					A	B	C	D	G	H	適合取付 ブラケット	重量 (g)	¥基準単価
					Lmax-10mm ストローク時		Lmax-(S)mm ストローク時											
					N	kgf	N	kgf	(S)									
GSSF	22150-400	475.0	325.0	150.0	392	40.0	623	63.6	140	10	10	10	10	10	293.5	361	2,030	
	22150-450				441	45.0	699	71.3										
	22150-500				490	50.0	777	79.3										
	22150-550				539	55.0	854	87.1										
	22160-350	500.0	340.0	160.0	343	35.0	527	53.8	150	10	10	10	10	309.5	370	2,190		
	22160-400				392	40.0	602	61.4										
	22160-450				441	45.0	677	69.1										
	22160-500				490	50.0	751	76.6										
	22170-550	610.0	440.0	170.0	539	55.0	750	76.5	160	12.5	10	10	10	406.5	500	2,240		
	22170-600				588	60.0	818	83.5										
	22170-650				637	65.0	886	90.4										
	22170-700				686	70.0	954	97.3										
	22170-750	600.0	400.0	200.0	735	75.0	1022	104.3	190	10	10	10	10	368	442	2,270		
	22170-800				784	80.0	1090	111.2										
	22170-850				833	85.0	1157	118.1										
	22200-150				147	15.0	230	23.5										
	22200-200	625.0	425.0	225.0	196	20.0	306	31.2	200	12.5	10	10	10	394	532	2,700		
	22200-250				245	25.0	381	38.9										
	22200-350				343	35.0	533	54.4										
	22200-400				392	40.0	608	62.0										
	22200-450	620.0	410.0	210.0	441	45.0	684	69.8	220	10	10	10	10	381.5	450	2,300		
	22200-500				490	50.0	759	77.4										
	22200-550				539	55.0	835	85.2										
	22200-600				588	60.0	974	99.4										
22200-700	680.0	470.0	230.0	686	70.0	1135	115.8	240	12.5	10	10	10	438.5	560	2,310			
22200-850				834	85.1	1378	140.6											
22210-350				343	35.0	533	54.4											
22210-400				392	40.0	608	61.5											
22210-450	750.0	500.0	250.0	441	45.0	684	69.8	250	10	10	10	10	469	629	2,830			
22210-500				490	50.0	759	77.4											
22210-550				539	55.0	831	84.8											
22210-600				588	60.0	905	92.3											
22210-650	710.0	450.0	260.0	637	65.0	980	100.0	260	12.5	10	10	10	472.5	650	2,880			
22210-700				686	70.0	1055	107.7											
22210-750				735	75.0	1130	115.3											
22210-800				784	80.0	1204	122.9											
22210-850	875.0	575.0	300.0	833	85.0	1280	130.6	290	12.5	10	10	10	544	725	2,920			
22250-600				588	60.0	993	101.3											
22250-700				686	70.0	1157	118.1											
22250-850				834	85.1	1405	143.4											
22260-350	965.0	650.0	315.0	343	35.0	631	64.4	305	12.5	10	10	10	619	780	2,960			
22260-400				392	40.0	719	73.4											
22260-450				441	45.0	808	82.4											
22260-500				490	50.0	897	91.5											
22270-550	965.0	650.0	315.0	539	55.0	990	101.0	305	12.5	10	10	10	619	780	2,960			
22270-600				588	60.0	1080	110.2											
22270-650				637	65.0	1169	119.3											
22270-700				686	70.0	1258	128.4											
22270-750	965.0	650.0	315.0	735	75.0	1347	137.4	305	12.5	10	10	10	619	780	2,960			
22270-800				784	80.0	1437	146.6											
22270-850				833	85.0	1526	155.7											
22300-600				588	60.0	998	101.8											
22300-700	965.0	650.0	315.0	686	70.0	1164	118.8	305	12.5	10	10	10	619	780	2,960			
22300-850				834	85.1	1413	144.2											
22315-550				539	55.0	833	85.0											
22315-600				588	60.0	908	92.7											
22315-650	965.0	650.0	315.0	637	65.0	983	100.3	305	12.5	10	10	10	619	780	2,960			
22315-700				686	70.0	1058	108.0											
22315-750				735	75.0	1133	115.6											
22315-800				784	80.0	1208	123.3											
22315-850	965.0	650.0	315.0	833	85.0	1284	131.0	305	12.5	10	10	10	619	780	2,960			
22315-900				882	90.0	1368	139.6											

Order 注文例: 型式 GSSF15050-100

Delivery 出荷日: 3 日目出荷

Price 価格: 数量スライド価格 (※1円未満切り捨て) P133

数量区分	標準対応	個別対応
	小口	大口
数量	1~9	10~14
値引率	5%	10%
	15~19	20~50
	5%	10%
	15~19	20~50
	5%	10%
	15~19	20~50
	5%	10%

※表示数量超えはWOSにてご確認ください。

37 新商品