

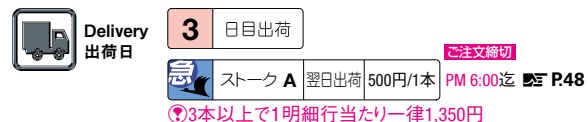



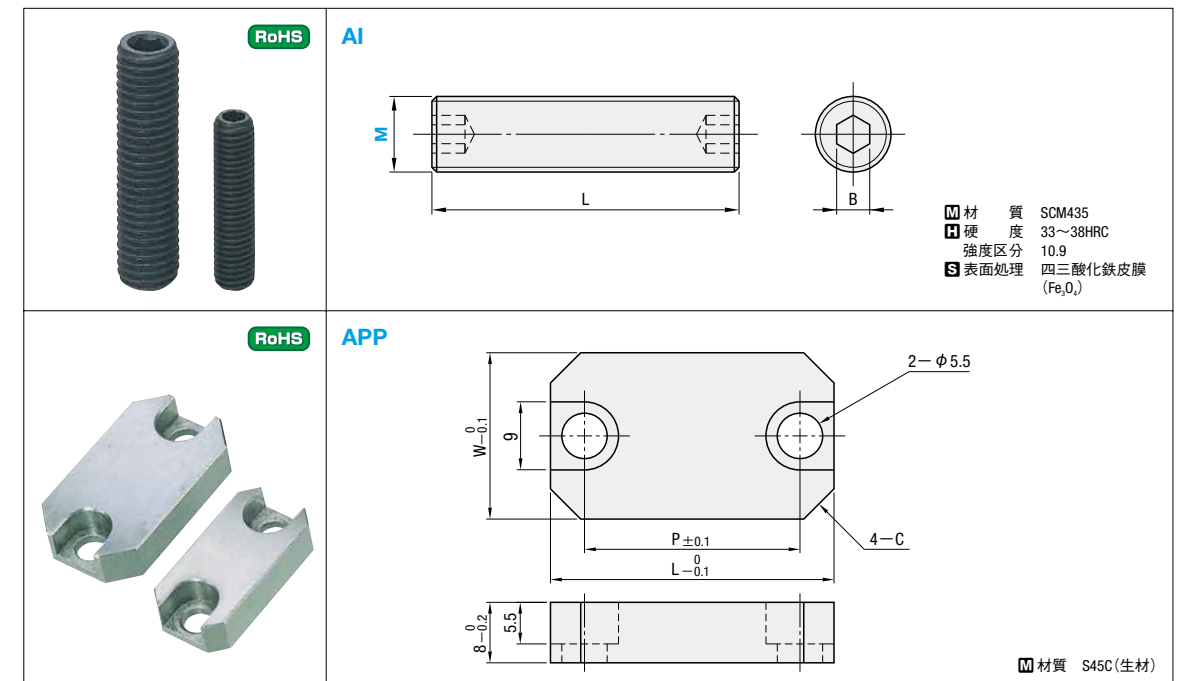
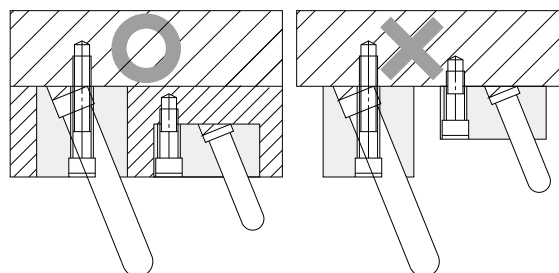

D _{H7}		W	L	H	t	F	d ₁	t ₁	M (抜きタブ)	取付 ボルト	ℓ	a	c	型 式		T	A° 指定1°単位
														Type	D		
8	+0.015	16	35	12	5	19	11	7	8	M 6	7	—	3	ボルト1本締めタイプ APRSS (S45C) APRSM (HPM2T相当)	8	20	10～20
10	0	18	40	14	10	21									14	9	
13	+0.018	22	50	17	10	27	16	55	20	13	30	13	30				
16	0	25	55	20	13	29						16	35				
8	+0.015	38	24	12	5	8	11	7	8	M 6	14	24	5	ボルト2本締めタイプ APRWS (S45C) APRW (HPM2T相当)	8	20 25	10～20
10	0	40	28	14	10	16					26	10			25 30		
13	+0.018	44	34	17	10	18					30	13			30 35		
16	0	48	40	20	13	21					34	16			35 40		
20	+0.021	58	45	24	13	15	14	9	10	M 8	25	40	8		20	40 45	
25		65	55	29	18	30					46	25			45 50		
30		75	65	36	15	22					18	11			12	M10	
													10				






D	T	¥基準単価 1～9本			
		APRSS	APRSM	APRWS	APRWM
8	20	2,700	3,460	2,850	3,610
	25	—	—	3,010	3,760
10	25	3,160	3,610	3,300	3,760
	30	—	—	3,460	5,120
13	30	3,910	4,970	4,360	5,260
	35	—	—	4,810	5,420
16	35	4,970	5,260	5,420	5,570
	40	—	—	6,020	7,680
20	40	—	—	6,770	8,130
	45	—	—	7,380	8,580
25	45	—	—	9,340	11,450
	50	—	—	9,940	12,200
30	55	—	—	10,850	13,410
	60	—	—	11,600	14,320



Alterations	Code	Spec.	¥/1Code
	MNC	リテーナ取付穴加工なし	—500
	TC	厚み変更TC=指定0.1mm単位 ♡ $T > TC \geq \frac{T_{min.} + t}{2} + 2.0$ ♡ MNC併用時、 $T > TC \geq \frac{T_{min.}}{2}$	1,000



M×Pitch (並 目)	L	B	型 式		基準單位
			Type	M	1~9本
M 6×1.0	30	3	AI	6	180
M 8×1.25	35	4		8	200
M10×1.5	40	5		10	230
M12×1.75	50	6		12	270
M16×2.0	60	8		16	400
M20×2.5	70	10		20	530

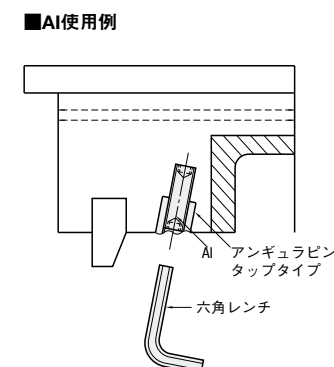

- パーティングライン下からでも取り付け可能です。
- アンギュラピンが折れた場合でも、六角レンチで簡単にはずせる場合があります。

