


精級エジェクタガイドピン


—インロータイプ—

2日目納短縮

追加工価格も数量スライド適用 P.49

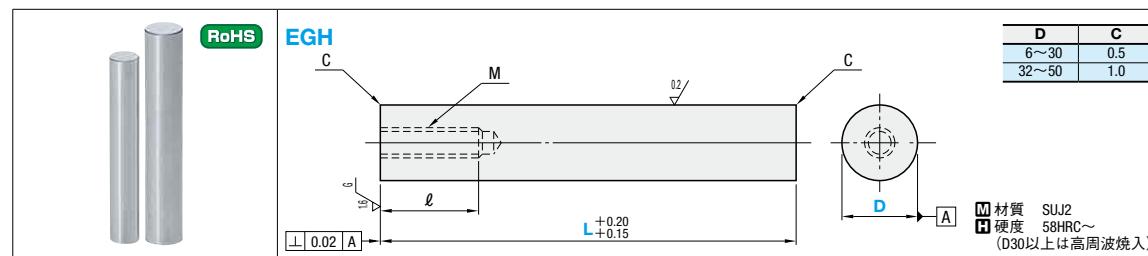

D	M Pitch	l	型式 Type	L 指定5mm単位 Pitch	¥基準単価 1~9本
6	M4 0.7	8	6	30~70	380
8	M5 0.8	10	75~80	430	
10	M5 0.8	10	30~70	300	
12	M6 1.0	12	75~100	350	
13	M6 1.0	12	30~70	330	
12	M6 1.0	12	75~100	380	
13	M6 1.0	12	40~70	360	
13	M6 1.0	12	75~100	410	
13	M6 1.0	12	40~70	390	
16	M6 1.0	12	75~100	440	
16	M6 1.0	12	105~125	480	
16	M6 1.0	12	130~150	530	
16	M6 1.0	12	40~70	440	
20	M8 1.25	16	75~90	490	
20	M8 1.25	16	95~110	580	
20	M8 1.25	16	115~130	640	
20	M8 1.25	16	135~150	550	
20	M8 1.25	16	130~150	600	
20	M8 1.25	16	40~70	490	
20	M8 1.25	16	75~90	530	
25	M8 1.25	16	95~110	580	
25	M8 1.25	16	115~130	640	
25	M8 1.25	16	135~150	720	
25	M8 1.25	16	155~175	790	
25	M8 1.25	16	50~70	620	
25	M8 1.25	16	75~90	680	
25	M8 1.25	16	95~110	720	
25	M8 1.25	16	115~130	790	
25	M8 1.25	16	135~150	900	
25	M8 1.25	16	155~170	1,010	
25	M8 1.25	16	175~200	1,120	
25	M8 1.25	16	205~225	1,250	
25	M8 1.25	16	230~250	1,390	
30	M10 1.5	20	50~70	910	
30	M10 1.5	20	75~90	960	
30	M10 1.5	20	95~110	1,070	
30	M10 1.5	20	115~130	1,150	
30	M10 1.5	20	135~150	1,230	
30	M10 1.5	20	155~170	1,370	
30	M10 1.5	20	175~200	1,510	
30	M10 1.5	20	205~225	1,560	
30	M10 1.5	20	230~250	1,620	
30	M10 1.5	20	255~275	1,900	
30	M10 1.5	20	280~300	2,180	
32	M10 1.5	20	50~70	1,130	
32	M10 1.5	20	75~90	1,190	
32	M10 1.5	20	95~110	1,340	
32	M10 1.5	20	115~130	1,450	
32	M10 1.5	20	135~150	1,550	
32	M10 1.5	20	155~170	1,690	
32	M10 1.5	20	175~200	1,800	
32	M10 1.5	20	205~225	1,960	
32	M10 1.5	20	230~250	2,020	
32	M10 1.5	20	255~275	2,360	
32	M10 1.5	20	280~300	2,700	

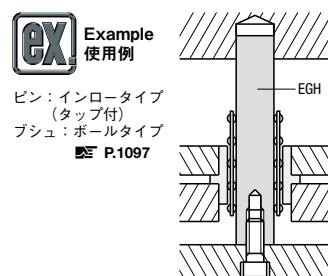

Alterations	Code	Spec.	¥/1Code
LC	全長変更 LC=指定0.1mm単位 ②Lmin.<LC<Lmax.	D=6~30 D=32~50 200 400	
LKC	全長公差変更 L ^{+0.20} ... L ^{-0.15} ≤ L ≤ 200 ... +0.02 200 < L ≤ 350 ... +0.03	400	
LKV	L ^{+0.20} ... +0.01 ②L>150適用不可 ③LC併用時、LC0.01mm単位指定可	800	
AVC	エアペント加工 全D寸 ... 溝深さ : 0.5±0.1 溝幅 : 1.0±0.5	400	


④ LKC・LKVをご使用の場合、1オーダー4本以内は同時研磨致します。(L寸法公差は表記のとおりですが、L寸法のバラツキは0.01以内に仕上げます。)

精級エジェクタガイドピン

—突き当てタイプ—

2日目納短縮

追加工価格も数量スライド適用 P.49

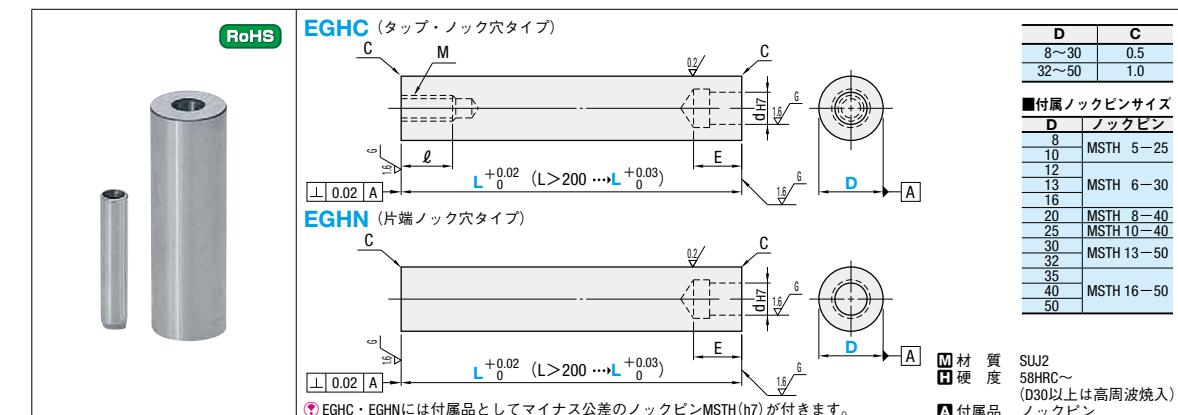

D	M Pitch	l	d _{H7}	E	型式 Type	D	L 指定5mm単位 Pitch	¥基準単価 1~9本
8	M5 0.8	10	5	12	EGHC 8	40~70	750	—
10	M5 0.8	10	5	12	EGHC 10	75~100	800	700
12	M6 1.0	12	6	15	EGHC 12	40~70	830	730
13	M6 1.0	12	6	15	EGHC 13	75~100	890	790
16	M6 1.0	12	6	15	EGHC 16	105~125	930	830
20	M8 1.25	16	8	20	EGHC 20	40~70	900	800
25	M8 1.25	16	10	25	EGHC 25	50~90	1,040	940
30	M10 1.5	20	13	25	EGHC 30	205~230	2,300	2,140
32	M10 1.5	20	13	25	EGHC 32	125~150	1,110	1,010
35	M10 1.5	20	13	25	EGHC 35	125~150	1,270	1,170
40	M10 1.5	20	13	25	EGHC 40	125~150	1,410	1,300
50	M10 1.5	20	13	25	EGHC 50	125~150	1,980	1,870

Alterations	Code	Spec.	¥/1Code
SC	スパナ溝加工 ②D≥10に適用となります。	D=10~40 D=50 10 30 27 12 8 32 27 15 13 35 30 40 36 20 16 13 20 17 10 50 46 20 25 22	400 600
LC	全長変更 LC=指定0.1mm単位 ②Lmin.<LC<Lmax. 標準5mm単位の寸法からカットしますのでタップ長さは(標準L-LC)分短くなります。	D=8~30 D=32~50 200 400	200 400
LKV	全長公差変更 L ^{+0.20} ... +0.01 ②L>150適用不可 ③LC併用時、LC0.01mm単位指定可	800	800