
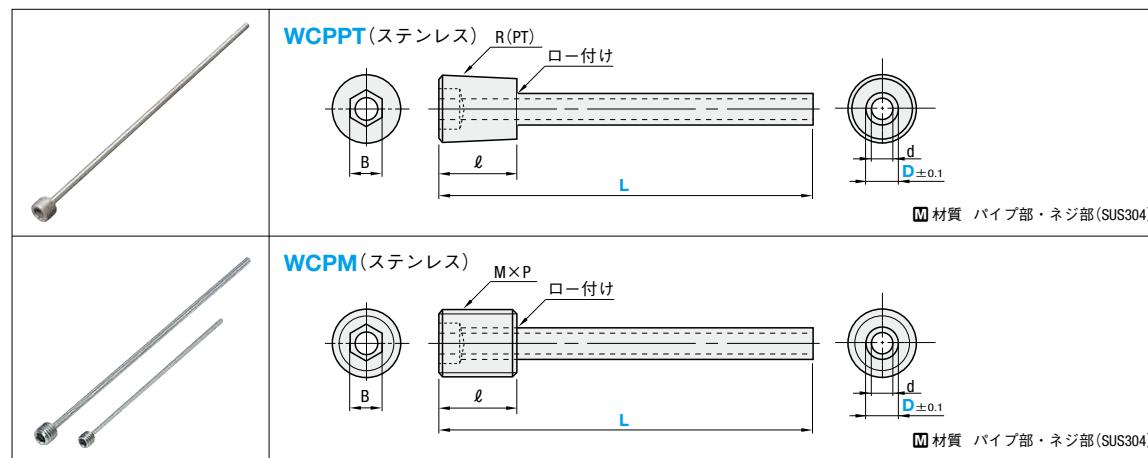


## 冷却パイプ

-テーパネジ/平行ネジ/黄銅/ステンレス-

規格変更  
※文字表示

R(Pt)	M×Pitch	B	l	d	型式	L	¥基準単価 1~19本		
WCPPT	WCPM	WCPPT	WCPM	WCPPT	WCPM	Type	D	WCPPT	WCPM
1/8	M 6×1.0	5	3	6	1.6	WCPPT (ステンレス)	2	150	720
	M 8×1.25		4	7	2.5		200	750	430
				8	3.6		200	790	450
							250	820	490
							200	840	520
							300	890	550

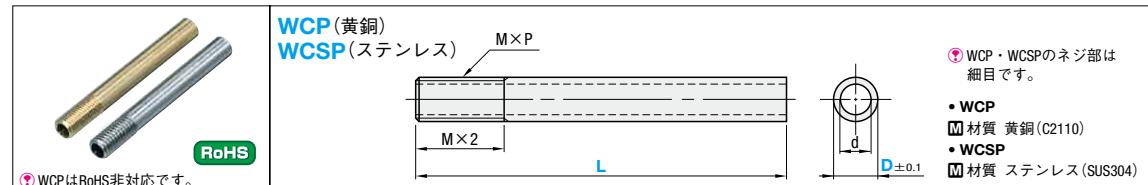


M×Pitch (細目)	d	型式	L	¥基準単価 1~19本
Type	D	WCP	WCSP	
M3×0.35	1.0	WCP (黄銅) WCSP (ステンレス)	3	50 100 290 330
			150 200	330 380
			4	50 100 310 360
			150 200	360 410
M4×0.5	2.0		5	50 100 330 380
			150 200	380 430
			250 300	480 520
			6	50 100 380 430
M5×0.5	3.0		150 200	430 480
			250 300	520 570
			8	50 100 430 480
			150 200	480 520
M6×0.75	4.0		250 300	570 620
			10	50 100 480 520
			150 200	570 620
			250 300	710 760



## 冷却パイプ

-ノック止めタイプ/ツバ止めタイプ-

① WCPSTはWCPSTへ規格変更となりました

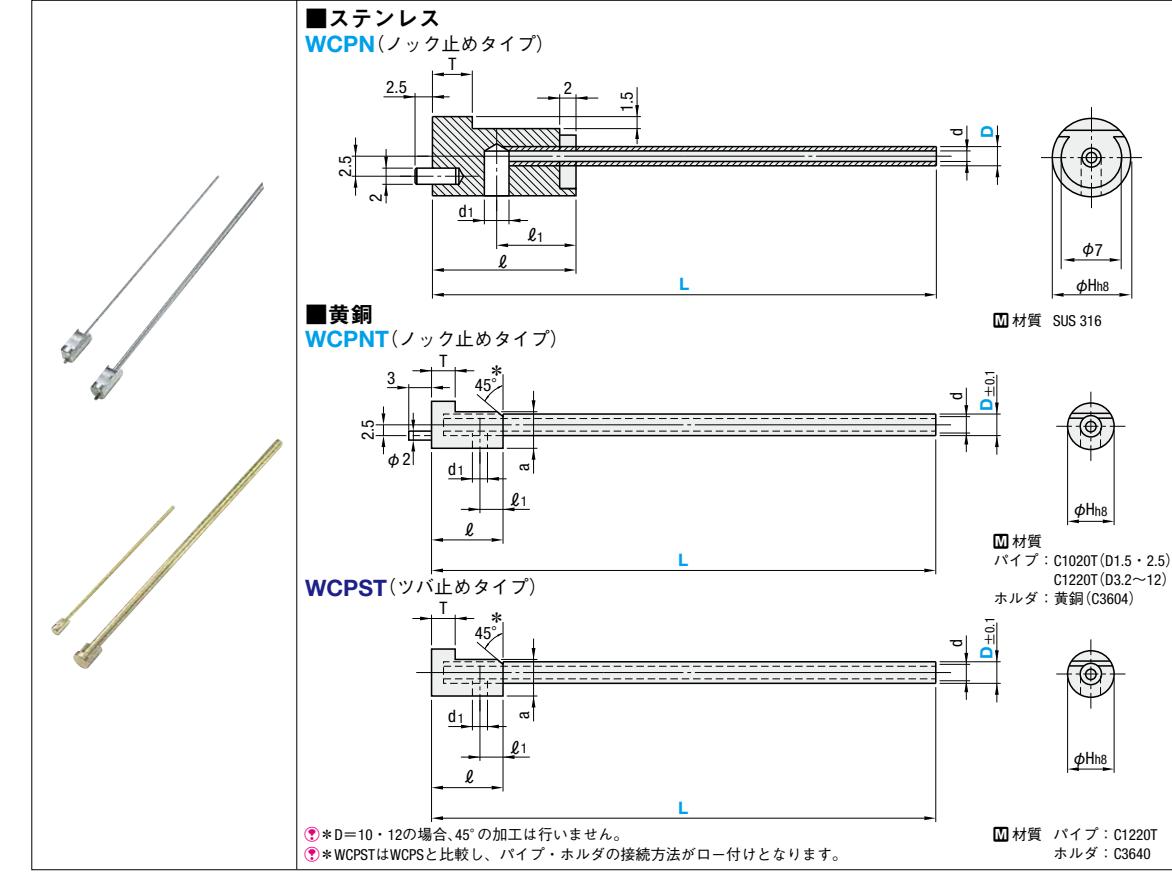

φH8	T	l1	l	d1	a	d	型式	L	¥基準単価 1~4本		
							Type		WCPN (D≤3.2)	WCPNT (ノック止め)	WCPST (ツバ止め)
10	0 -0.022	4	10	18	3	8.5	0.9	WCPN (D≤3.2) (ノック止め)	1.5 150	3,990 2,020	-
							1.5		2.5 150	4,180 2,100	
							2.5		3.2 200	4,370 2,180	
							3.2		4 200	1,770 1,620	
12	0 -0.027	5.1	20	12	3.5	7.2	3		6 300	1,970 1,900	-
							5.4		8 300	2,150 2,000	
							9.5		10 350	2,530 2,380	
							5		12 350	2,750 2,470	
15	0 -0.027	5.1	20	12	6.5	12	6		-	-	-
							6		-	-	
							8		-	-	
							10		-	-	
18	0 -0.033	5.6	11	22	8.5	11	8		-	-	-
							10.5		-	-	
							14		-	-	
							10		-	-	
③ WCPNTは( )内寸法となります。											

