



## COOLING PIPES

## 冷却パイプ

-テープネジ/平行ネジ/黄銅/ステンレス-

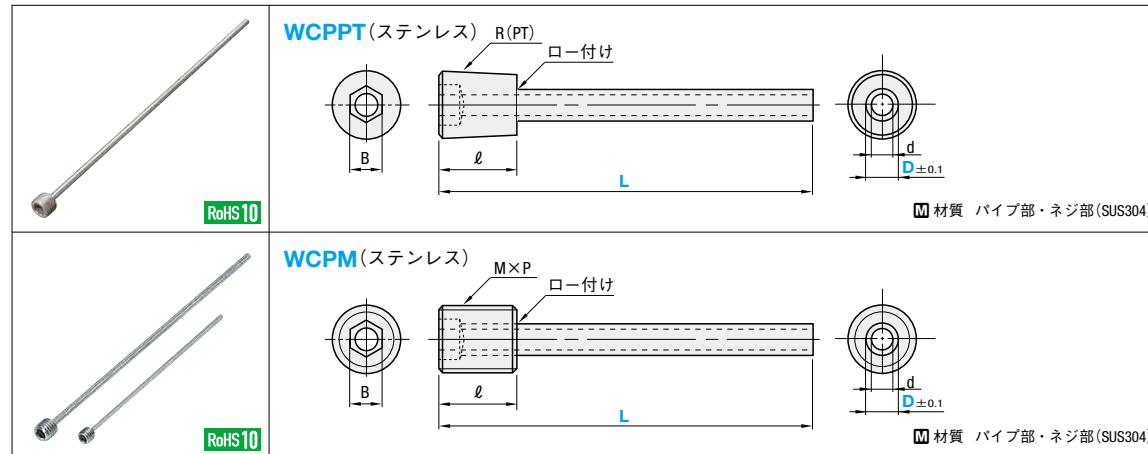

R(PT)	B	l	d	型式		L	M×Pitch	B	l	d	型式		L
				Type	D						Type	D	
1/8	5	7	1.6	WCPPT (ステンレス)	2	150	M6 × 1.0	3	6	1.6	WCPM (ステンレス)	2	150
			2.5		3	200						3	200
			3.6		4	250	M8 × 1.25	4	8	2.5		4	250
						300							200

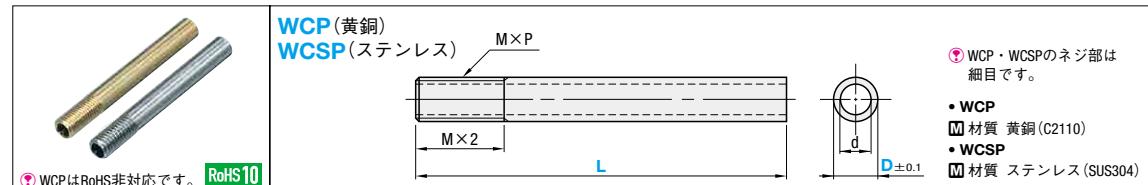


M×Pitch (細目)	d	型式				L							
		Type	D	L									
M3 × 0.35	1.0	WCP (黄銅)	3	50	100	150	200						
M4 × 0.5	2.0		4	50	100	150	200						
M5 × 0.5	3.0		5	50	100	150	200	250	300				
M6 × 0.75	4.0	WCSP (ステンレス)	6	50	100	150	200	250	300				
M8 × 0.75	5.0		8	50	100	150	200	250	300				
M10 × 1.0	7.0		10	50	100	150	200	250	300				

Order 注文例	型式		L
	WCPPT3	—	
	WCSP 6	—	150
	WCPM 2	—	150

Delivery 出荷日	型式		L
	WCPPT3	—	
	WCSP 6	—	150

Example  
使用例

• WCP・WCSP

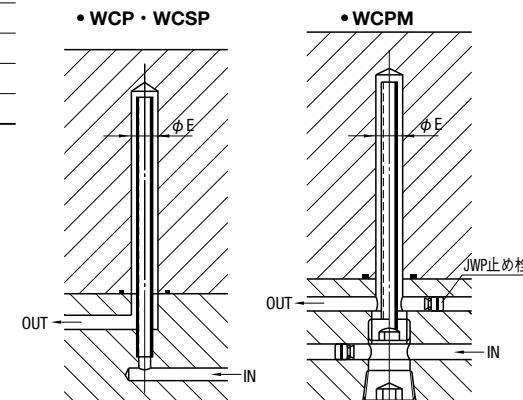


※推奨ΦEは右ページ使用例をご参照ください。

## COOLING PIPES

## 冷却パイプ

-ノック止めタイプ/ツバ止めタイプ-

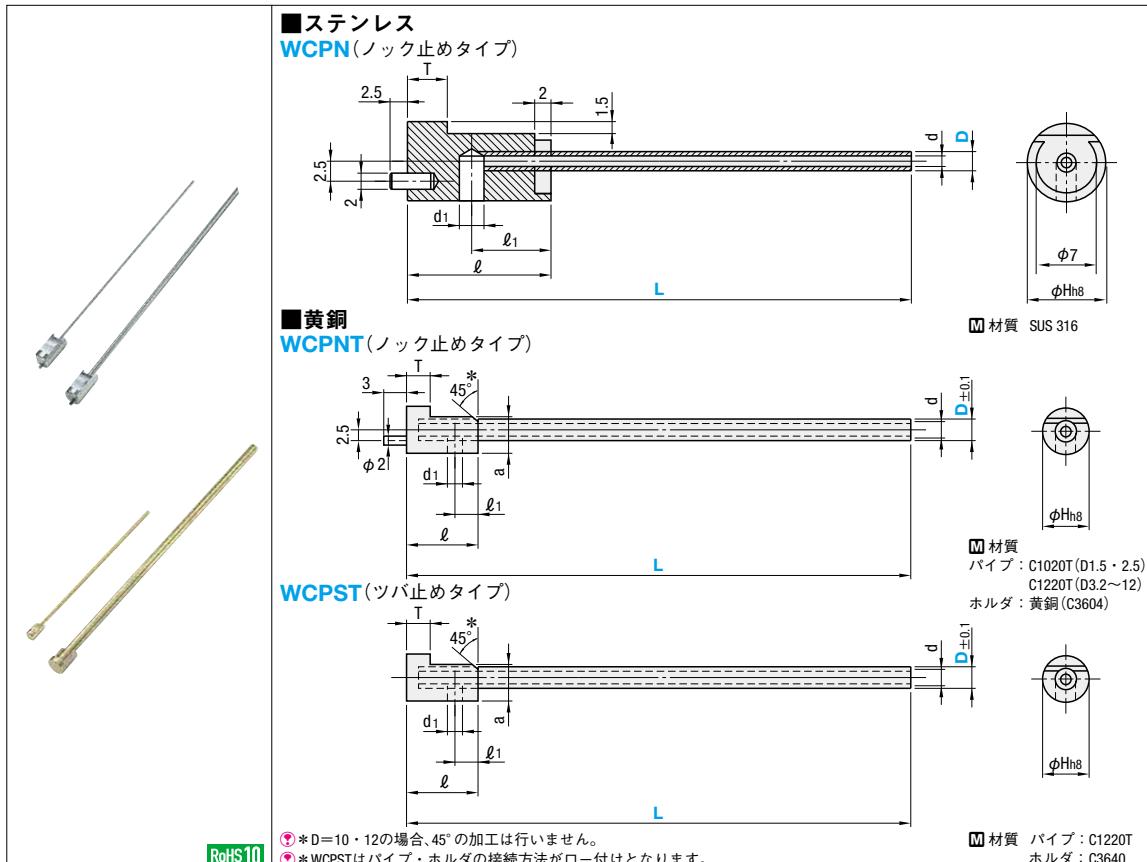

φH8	T	l1	l	d1	a	d	型式		L
							ステンレス	黄銅	
10	—0.022	4	10	3	8.5	0.9 1.5 2.2(2.0)	WCPN (D≤3.2) (ノック止め)	— WCPNT (ノック止め)	1.5 2.5 3.2 4 6 8 10 12
12	0	5.1	20	3.5 5.4 6.5	7.2 9.5 12	3 5 6	WCPNT (ノック止め)	— WCPST (D≥4) (ツバ止め)	150 200 200 300 350 350
15	-0.027	5.6	11	8.5	11	8	—	— WCPST (D≥4) (ツバ止め)	300 350 350
18	0	22	22	10.5	14	10	—	— WCPST (D≥4) (ツバ止め)	350 350
※WCPNTは( )内寸法となります。									

Order 注文例	型式		L
	WCPN1.5	—	
	WCPNT2.5	—	150
	WCPST4	—	200

Delivery 出荷日	型式		L
	WCPN1.5	—	
	WCPNT2.5	—	150
	WCPST4	—	200

D	推奨ΦE										
		1.5~2	2.5	3~3.2	4~5	6	8	10	12	16	20
1.5~2	4~5										
2.5	5~6										
3~3.2	6~7										
4~5	8										
6	10										
8	12										
10	16										
12	20										

