


D	d ₁	E		d ₂	B	C	l	M	t	D ₁	G min	H	型式	L
		PKHL	PKHLU											
50		83	0		120	110	40			58	60		50	240
			-0.010				20							280
60	+0.035 +0.030	95	0	+0.1	130	120	50			68	30	80	60	260
	+0.045						30							300
80		120	0	+0.045 +0.015	140	130	50			88		100	80	300
							30							340
100	+0.040 +0.032	145	-0.012		160	150	50			16	15	108	100	350
	+0.070 +0.045						30							400
							10							450

①d₁、d₂はP1164下記「取付け穴加工寸法公差」となります。


②構成部品の単体販売 P1162

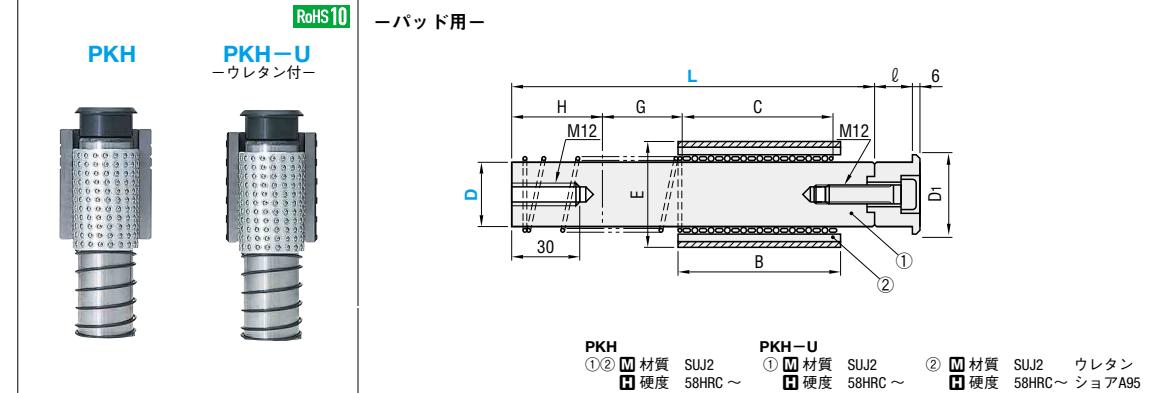

D	d ₁	E		d ₂	B	C	l	D ₁	G min	H	型式	L	指定10mm単位	
		PKH	PKH-U										Type	D
38	+0.030 +0.025	+0.060 +0.040	64	0	-0.008	+0.040 +0.015	80	50 20	46	20	40	PKH	38	130～160
								75 30		25				170～200
50	+0.035 +0.030	+0.065 +0.045	83	0	-0.010	+0.045 +0.015	100	60 20	58	30	50	PKH-U	50	150～190
								90 30						200～240
60	+0.030 +0.035	+0.045 +0.065	95	-0.010		+0.045 +0.015		70 20	68	20	60		60	170～210
								90 30	88					220～260
80		120											80	260～300

①d₁、d₂はP1164下記「取付け穴加工寸法公差」となります。

②構成部品の単体販売 P1162

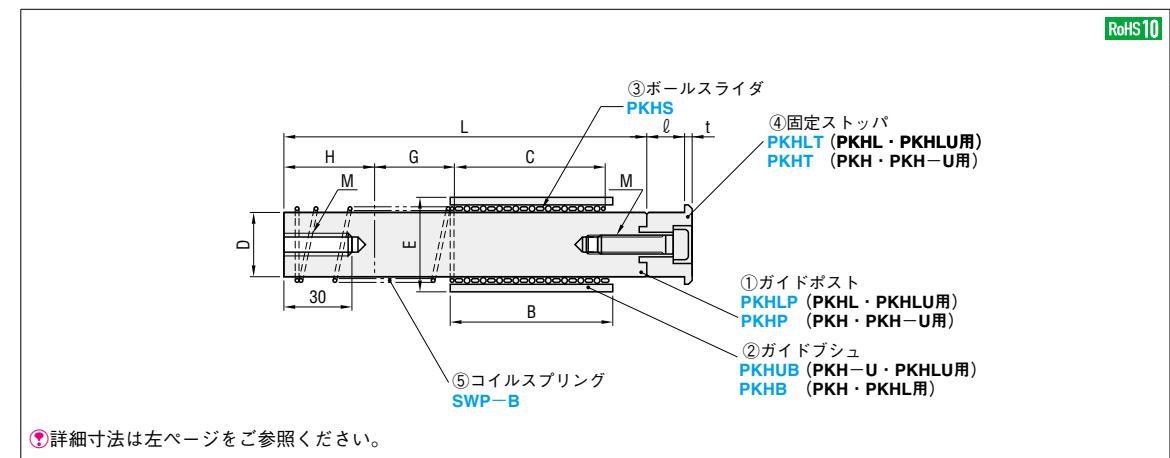

セット			①ガイドポスト		②ガイドブッシュ		③ボールスライダ		④固定ストッパー		
Type	D	L	Type	D	L	Type	D-B	Type	D-C	Type	D-l
型ガイド用 PKHL PKHLU	50	240	PKHLP (PKHL用)	50	240	PKH (PKH用)	50-120	PKHS	50-110	PKHLT (PKHL用)	50-40
		280		50	280		60-130		60-120		50-20
	60	260		60	300		80-140		80-130		60-50
		300		80	300		100-160		100-150		60-30
	80	300		80	340						80-50
		340		100	400						80-30
	100	400		100	450						100-10
		450		38	130～160	パッド用 PKH PKH-U	38	PKH (PKH-U用)	38-50	パッド用 PKHT	38-20
		170～200		50	150～190		50		50-60		38-30
	50	200～240		60	200～240		60		50-90		50-30
		170～210		60	220～260		60		60-70		60-20
	60	220～260		80	260～300		80		60-90		60-30
		300							80-90		80-30



⑤コイルスプリング (規格詳細 P1163)			⑤コイルスプリング	
セット			Type	D
型ガイド用 PKHL PKHLU	50	240	SWP-B	50 140
		280		50 150
	60	260		60 150
		300		60 170
	80	300		80 180
		340		80 200
	100	350		100 230
		400		100 260
	100	450		
パッド用 PKH PKH-U	38	130～160	SWP-B	38 L-50
		170～200		38 L-60
	50	150～190		50 L-70
		200～240		50 L-90
	60	170～210		60 L-90
		220～260		60 L-100
	80	260～300		80 L-100