

無給油スライドプレート

-銅合金10mm・ボルト2穴/4穴タイプ-



RoHS10



RoHS10

ℓ	型式	W	L	ℓ	ℓ_1	型式	W	L
45	- ボルト 2穴タイプ - STW	28	75	50	50	- ボルト 4穴タイプ - STW	100	100
50			100	75	100		125	125
75			125	100	150		150	200
100			150	150	200		250	250
45		38	75	200	100		150	150
50			100	100	150		200	250
75			125	150	200		250	300
100		48	150	150	200		100	125
45			75	100	100		125	150
50			100	100	150		150	200
75		58	125	100	100		200	250
100			150	150	150		250	300
150			200	75	100		100	150
45	- ボルト 2穴タイプ - STWT	100	75	100	100		150	200
50			100	125	150		200	250
75			125	150	200		250	300
100		125	150	150	200		100	150
150			200	150	200		200	250
25			75	100	100		150	200
50			100	125	150		200	250
75			125	150	200		250	300
100			150	150	200		100	150
150			200	150	200		200	250
50		150	100	100	100		150	200
75			125	125	150		200	250
100			150	150	200		250	300
150			200	150	200		100	150




Order
注文例

型式	W	-	L
STW	75	-	100
STWT	100	-	200



Delivery
出荷日



在庫品



■無給油スライドプレート用シム P.1278

※W=28、38の
全周R2となります。

・スライド方向
W=48以上

W=28、38
長手(L)方向のみ

・ご使用にあたっては
初期なじみグリースを
塗布したほうがより効
果的です。
グリースMGS P.1037


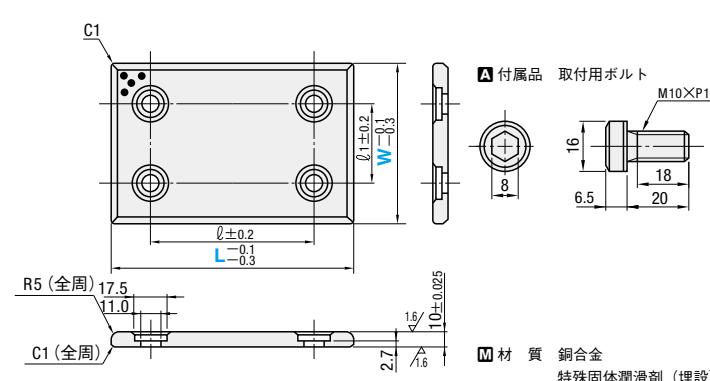
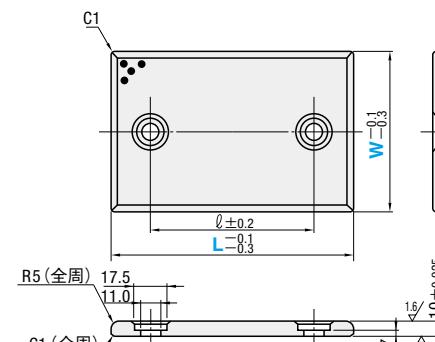


■材質 銅合金
特殊固体潤滑剤(埋設)

無給油スライドプレート用シム

RoHS10

SMP

W=28~75
(2穴用)W=100~150
(2穴・4穴共用)W=200
(4穴用)

T T
0.05 ±0.01
0.1 ±0.02

■材質 SUS304

ℓ	ℓ_1	型式	W	L	T
45	SMP	28	75		
50			100		
75			125		
100		38	150		
150			200		
45			250		
50		50	75		0.05
75			100		
100			125		
150		48	150		
45			200		
50			250		
75			300		
100		58	100		0.1
150			125		
25			150		
50	SMP	75	100		
75			125		
100			150		
150		100	200		
200			250		
25			300		
50		150	100		
75			125		
100			150		
150		200	200		
200			250		
250			300		

■適用無給油スライドプレート
• MWF-MWFT P.1275

• SEW-SEWT P.1276

• STW-STWT P.1277

Order
注文例

型式	W	-	L	-	T
SMP	75	-	100	-	0.1

Delivery
出荷日



在庫品