

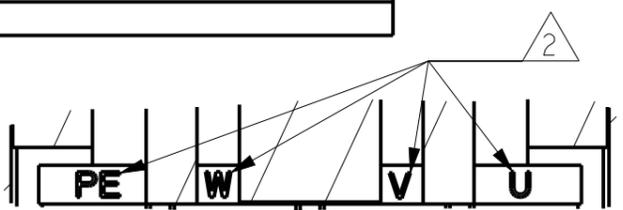
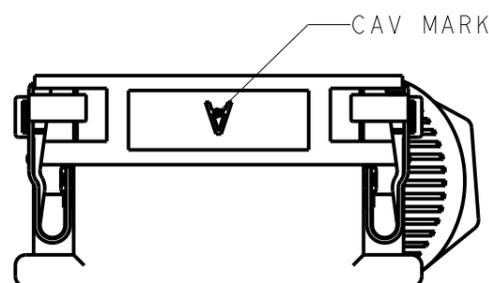
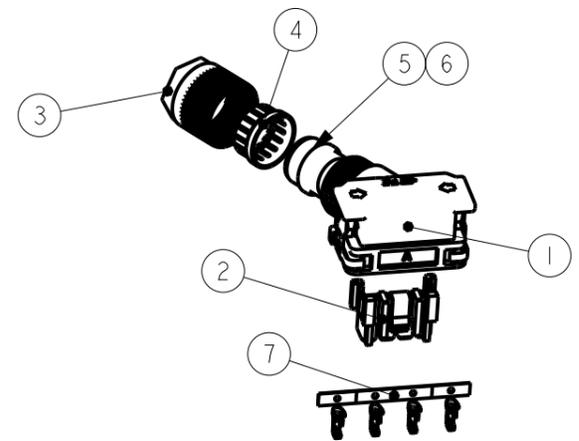


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


| REVISIONS | | | | | |
|-----------|-----|-----------------------------------|-------------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | A | RELEASED | 19 JUN 2020 | CL | NY |
| | B | REVISED (ADDED CIRCUIT MARK) | 02 JUL 2020 | CL | NY |
| | C | REVISED (ADDED LUBRICANT RELATED) | 11 MAY 2021 | CL | NY |

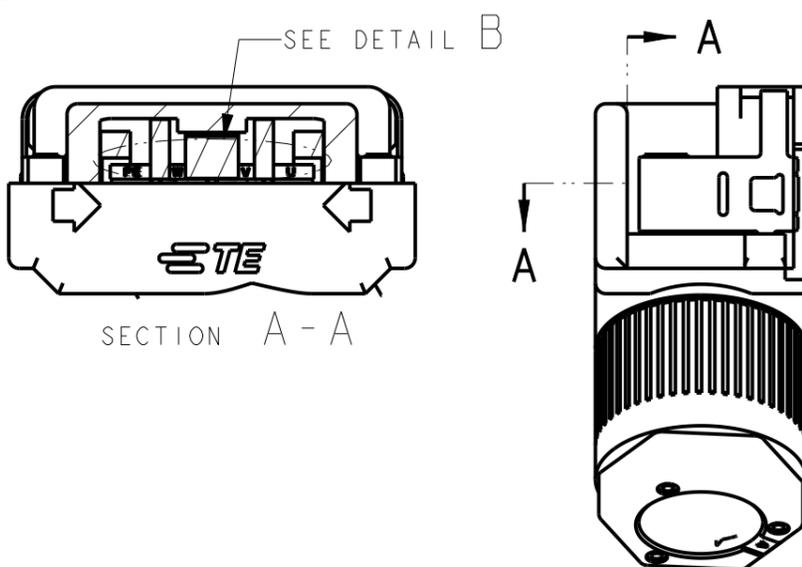

CIRCUIT MARK
DETAIL B
SCALE 4:1

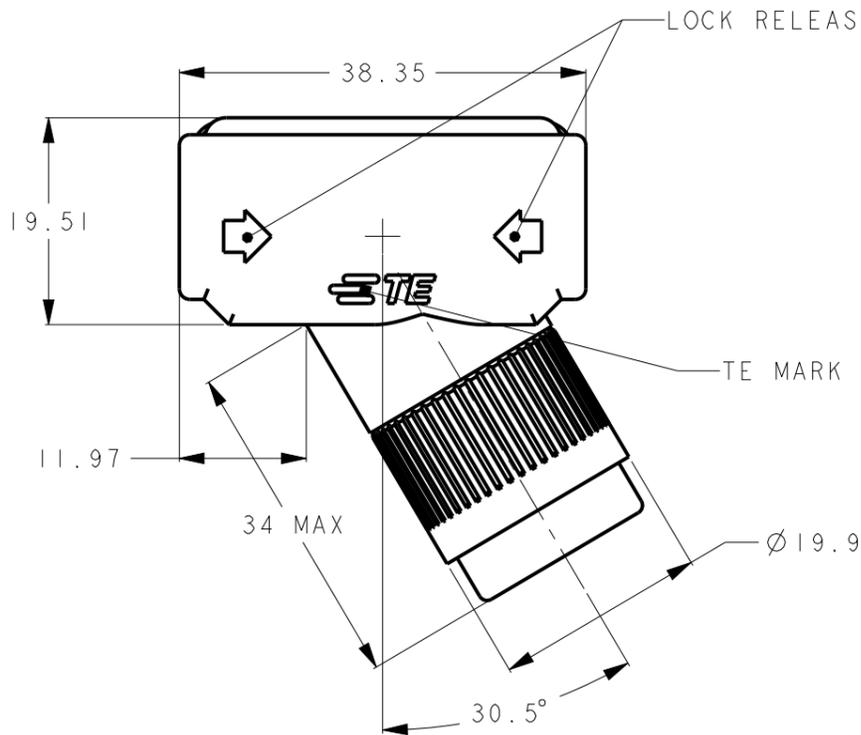

SCALE 1:2

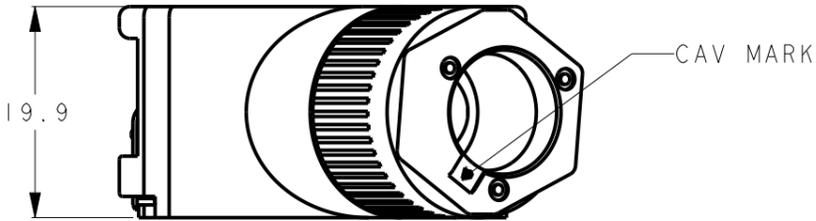

リセプタブルコネクタ組立後の参考寸法
REFERENCE DIMENSION OF
ASSEMBLED RECEPTABLE CONNECTOR

| QTY | FINISH | MATERIAL | NAME | ITEM | |
|-----|--------|--|--|-----------------------------------|---|
| -2 | -1 | NICKEL AND GOLD PLATING. ニッケルメッキ、金めっき | COPPER ALLOY 銅合金 | REC CONTACT 4 POSN. リセコンタクト 4極 | 7 |
| | | | HNBR, BLUE 水素化ニトリルゴム、青 | BUSH-S フッシュ-S | 6 |
| | | | HNBR, BLACK 水素化ニトリルゴム、黒 | BUSH-L フッシュ-L | 5 |
| | | | POLYACETAL RESIN, NATURAL ポリアセタール樹脂、ナチュラル | WIRE CLAMP ワイヤークランプ | 4 |
| | | | PBT RESIN, BLACK PBT樹脂、黒 | SCREW HSG スクリューハウジング | 3 |
| | | | PBT RESIN, BLACK PBT樹脂、黒 | INNER HOUSING インナーハウジング | 2 |
| | | LUBRICANT COATING 潤滑剤コーティング | HOUSING: PBT RESIN, BLACK LOCK: STAINLESS STEEL ハウジング: PBT樹脂、黒 ロック: ステンレススチール | CASE ASSY ケースアッセンブリー | 1 |

NOTE:
1. NET WEIGHT : -1: 20.539g
 -2: 21.327g
2. CIRCUIT MARK IN INNER HOUSING

| AWG18-16 | 1.8-2.8 | Ø9.2~11.4 | -1 -2 |
|---------------------|-------------------------------------|---------------------------------|----------|
| WIRE SIZE 電線 サイズ | INSULATION DIAMETER 電線被覆サイズ (mm) | JACKET DIAMETER ジャケット外径 (mm) | P/N |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: C.LI 05JUN2018
CHK: N.YAMASAKI 05JUN2018
APVD: N.YAMASAKI 05JUN2018

TE Connectivity

NAME: RECEPTACLE CONNECTOR, KIT, RIGHT ANGLE MMC-PUSH ON-P-F90

PRODUCT SPEC: 108-140233
APPLICATION SPEC: 114-5540

WEIGHT: SEE NOTE 1

CUSTOMER DRAWING

SIZE: A3 CAGE CODE: - DRAWING NO: C-2314083 RESTRICTED TO: -

SCALE: 3:2 SHEET: 1 OF 1 REV: C